



Switch



Microswitch



Lever



Balance




Vandal-proof

SWITCHES AND DIVERTERS

2021

UNIPOLAR LEVER SUBMINIATURE SWITCH




Montaggio



Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1000V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type to weld
 No. of terminals 2

| Code | Function | Type |
|-------------------|----------|------|
| 24.5000.16 | ON-OFF | SPST |

UNIPOLAR LEVER SUBMINIATURE DIVERTER




Montaggio



Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1000V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type to weld
 No. of terminals 3

| Code | Function | Type |
|-------------------|-----------|------|
| 24.5200.16 | ON-ON | SPDT |
| 24.5200.10 | ON-OFF-ON | SPDT |

UNIPOLAR LEVER SUBMINIATURE DIVERTER




Montaggio




Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1000V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.5200.15 | ON-ON | SPDT |

UNIPOLAR LEVER SUBMINIATURE DIVERTER




Montaggio




Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1000V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.5200.13 | ON-ON | SPDT |

UNIPOLAR LEVER SUBMINIATURE DIVERTER




Montaggio




Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1000V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.5200.14 | ON-ON | SPDT |

LEVER SUBMINIATURE BIPOLAR DIVERTER




Montaggio



Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1000V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type to weld
 No. of terminals 6

| Code | Function | Type |
|-------------------|-----------|------|
| 24.5000.26 | ON-ON | DPDT |
| 24.5000.29 | ON-OFF-ON | DPDT |


ONE-POLE MINIATURE LEVER SWITCH

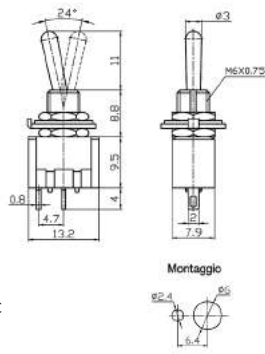

Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minuto 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type to weld
 No. of terminals 2

| Code | Function | Type |
|-------------------|----------|------|
| 24.5000.40 | ON-OFF | SPST |


MINIATURE TWO-POLE LEVER SWITCH

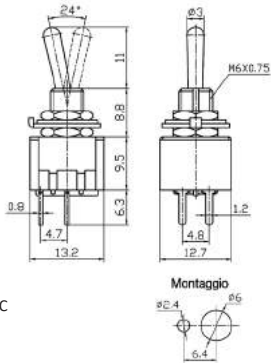

Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minuto 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 4

| Code | Function | Type |
|-------------------|----------|------|
| 24.5000.36 | ON-OFF | DPST |


UNIPOLAR LEVER MINIATURE DIVERTER



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minuto 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type to weld
 No. of terminals 3

| Code | Function | Type | Thread |
|-------------------|---------------|------|----------|
| 24.5200.17 | (ON)-OFF-(ON) | SPDT | 1/4-40NS |
| 24.5200.18 | (ON)-OFF-ON | SPDT | 1/4-40NS |
| 24.5200.19 | ON-OFF-ON | SPDT | M6X0,75 |
| 24.5200.20 | ON-ON | SPDT | M6X0,75 |


UNIPOLAR LEVER MINIATURE DIVERTER



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minuto 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.5200.21 | ON-ON | SPDT |


UNIPOLAR LEVER MINIATURE DIVERTER

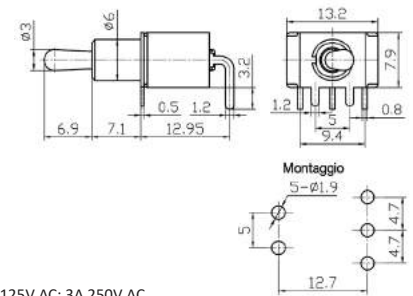

Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minuto 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.5000.45 | ON-ON | SPDT |


UNIPOLAR LEVER MINIATURE DIVERTER

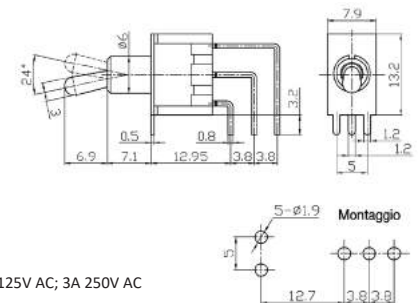

Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minuto 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 3

| Code | Funzione | Type |
|-------------------|----------|------|
| 24.5000.46 | ON-ON | SPDT |


MINIATURE TWO-POLE LEVER DIVERTER

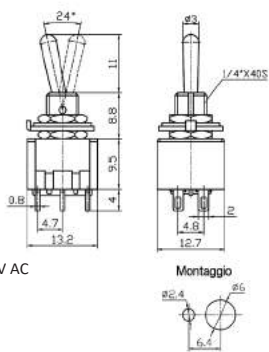

Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type To weld
 No. of terminals 6

| Code | Function | Type | Thread |
|-------------------|---------------|------|----------|
| 24.5200.29 | ON-OFF-ON | DPDT | M6X0,75 |
| 24.5000.30 | (ON)-OFF-(ON) | DPDT | 1/4-40NS |
| 24.5000.31 | (ON)-OFF-ON | DPDT | 1/4-40NC |
| 24.5000.50 | ON-ON | DPDT | M6X0,75 |


MINIATURE TWO-POLE LEVER DIVERTER



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 6

| Code | Function | Type |
|-------------------|-------------|------|
| 24.5200.22 | ON-ON | DPDT |
| 24.5000.38 | (ON)-OFF-ON | DPDT |


MINIATURE TWO-POLE LEVER DIVERTER

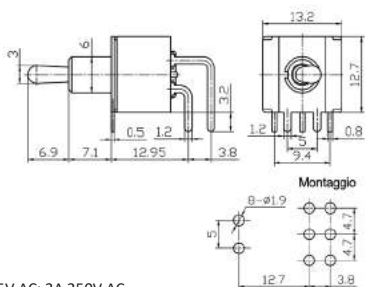

Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 6

| Code | Function | Type |
|-------------------|----------|------|
| 24.5000.55 | ON-ON | DPDT |


MINIATURE TWO-POLE LEVER DIVERTER

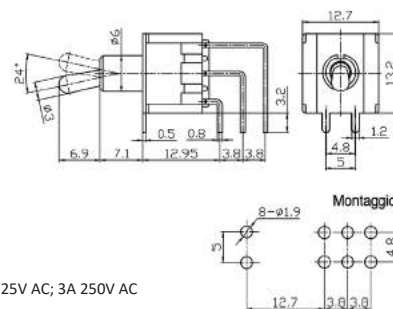

Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type da c.s.
 No. of terminals 6

| Code | Function | Type |
|-------------------|----------|------|
| 24.5000.56 | ON-ON | DPDT |


MINIATURE TRIPOLAR LEVER DIVERTER



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type To weld
 No. of terminals 9

| Code | Function | Type |
|-------------------|-----------|------|
| 24.5200.23 | ON-ON | 3PDT |
| 24.5000.60 | ON-OFF-ON | 3PDT |


MINIATURE FOUR-POLE LEVER DIVERTER



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type To weld
 No. of terminals 12

| Code | Function | Type |
|-------------------|-----------|------|
| 24.5200.24 | ON-ON | 4PDT |
| 24.5000.65 | ON-OFF-ON | 4PDT |


■ ONE-POLE MINIATURE SWITCH WITH FLAT METAL LEVER



| | |
|-----------------------|------------------------|
| Capacity | 6A 125V AC; 3A 250V AC |
| Contact resistance | 20mΩ max |
| Dielectric strength | 1 minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Lever | nickel-plated brass |
| Terminal type | To weld |
| No. of terminals | 2 |

| Code | Function | Type |
|-------------------|----------|------|
| 24.5005.00 | ON-OFF | SPST |


■ UNIPOLAR MINIATURE DIVERTER WITH PLASTIC FLAT LEVER



| | |
|-----------------------|------------------------|
| Capacity | 6A 125V AC; 3A 250V AC |
| Contact resistance | 20mΩ max |
| Dielectric strength | 1 minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Lever | Plastic |
| Terminal type | To weld |
| No. of terminals | 3 |

| Code | Function | Type | Lever Color |
|-------------------|---------------|------|-------------|
| 24.5010.10 | ON-ON | SPDT | Rosso |
| 24.5010.12 | ON-OFF-ON | SPDT | Rosso |
| 24.5010.14 | (ON)-OFF-(ON) | SPDT | Rosso |


■ ONE-POLE MINIATURE SWITCH WITH PLASTIC FLAT LEVER



| | |
|-----------------------|------------------------|
| Capacity | 6A 125V AC; 3A 250V AC |
| Contact resistance | 20mΩ max |
| Dielectric strength | 1 minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Lever | Plastic |
| Terminal type | To weld |
| No. of terminals | 2 |

| Code | Function | Type | Lever Color |
|-------------------|----------|------|-------------|
| 24.5010.00 | ON-OFF | SPST | Rosso |


■ MINIATURE TWO-POLE DIVERTER WITH PLASTIC FLAT LEVER



| | |
|-----------------------|------------------------|
| Capacity | 6A 125V AC; 3A 250V AC |
| Contact resistance | 20mΩ max |
| Dielectric strength | 1 minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Lever | Plastic |
| Terminal type | To weld |
| No. of terminals | 6 |

| Code | Function | Type | Lever Color |
|-------------------|-----------|------|-------------|
| 24.5010.20 | ON-ON | DPDT | Rosso |
| 24.5010.22 | ON-OFF-ON | DPDT | Rosso |


■ UNIPOLAR MINIATURE DIVERTER WITH FLAT METAL LEVER



| | |
|-----------------------|------------------------|
| Capacity | 6A 125V AC; 3A 250V AC |
| Contact resistance | 20mΩ max |
| Dielectric strength | 1 minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Lever | nickel-plated brass |
| Terminal type | To weld |
| No. of terminals | 3 |

| Code | Function | Type |
|-------------------|----------|------|
| 24.5005.50 | ON-ON | SPDT |


■ SINGLE-POLE LEVER SWITCH



| | |
|-----------------------|------------------------|
| Capacity | 4A 125V AC; 2A 250V AC |
| Contact resistance | 50mΩ max |
| Dielectric strength | 1 minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Lever | nickel-plated brass |
| Terminal type | To weld |
| No. of terminals | 2 |

| Code | Function | Type |
|-------------------|----------|------|
| 24.5210.00 | ON-OFF | SPST |

SINGLE-POLE LEVER SWITCH




Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type faston 6,3mm
 No. of terminals 2

Montaggio



| Code | Function | Type |
|-------------------|----------|------|
| 24.5200.50 | ON-OFF | SPST |

SINGLE-POLE LEVER SWITCH




Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type faston 6,3mm
 No. of terminals 2

Montaggio



| Code | Function | Type |
|-------------------|----------|------|
| 24.5226.06 | ON-OFF | SPST |

LEVER TWO-POLE SWITCH




Capacity 4A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type To weld
 No. of terminals 4

Montaggio



| Code | Function | Type |
|-------------------|----------|------|
| 24.5200.51 | ON-OFF | DPST |

SINGLE POLE DIVERTER WITH BLACK PLASTIC LEVER




Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever Plastic
 Terminal type screw
 No. of terminals 3

Montaggio



| Code | Function | Type | Lever Color |
|-------------------|-----------|------|-------------|
| 24.5213.00 | ON-ON | SPDT | Nero |
| 24.5214.00 | ON-OFF-ON | SPDT | Nero |

SINGLE-POLE LEVER SWITCH




Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type screw
 No. of terminals 2

Montaggio



| Code | Function | Type |
|-------------------|----------|------|
| 24.5226.05 | ON-OFF | SPST |

BIPOLAR DIVERTER WITH BLACK PLASTIC LEVER




Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever Plastic
 Terminal type screw
 No. of terminals 6

Montaggio



| Codice | Funzione | Tipo | Lever Color |
|-------------------|-----------|------|-------------|
| 24.5216.00 | ON-ON | DPDT | Nero |
| 24.5217.00 | ON-OFF-ON | DPDT | Nero |


SINGLE-POLE LEVER SWITCH



Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type screw
 No. of terminals 2

| Code | Function | Type |
|-------------------|----------|------|
| 24.5220.00 | ON-OFF | SPST |


LEVER TWO-POLE SWITCH



Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type faston 6,3mm
 No. of terminals 4

| Code | Function | Type |
|-------------------|----------|------|
| 24.5226.02 | ON-OFF | DPST |


SINGLE-POLE LEVER SWITCH



Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type faston 6,3mm
 No. of terminals 2

| Code | Function | Type |
|-------------------|----------|------|
| 24.5225.00 | ON-OFF | SPST |


SINGLE POLE LEVER DIVERTER



Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type screw
 No. of terminals 3

| Code | Function | Type |
|-------------------|-----------|------|
| 24.5220.02 | ON-ON | SPDT |
| 24.5220.04 | ON-OFF-ON | SPDT |


LEVER TWO-POLE SWITCH



Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type screw
 No. of terminals 4

| Code | Function | Type |
|-------------------|----------|------|
| 24.5222.00 | ON-OFF | DPST |


SINGLE POLE LEVER DIVERTER



Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type faston 6,3mm
 No. of terminals 3

| Code | Function | Type |
|-------------------|-----------|------|
| 24.5225.01 | ON-ON | SPDT |
| 24.5225.02 | ON-OFF-ON | SPDT |


LEVER BIPOLAR DIVERTER



Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type Screw
 No. of terminals 6

| Code | Function | Type |
|-------------------|---------------|------|
| 24.5222.02 | ON-ON | DPDT |
| 24.5222.04 | ON-OFF-ON | DPDT |
| 24.5222.05 | (ON)-OFF-(ON) | DPDT |


LEVER BIPOLAR DIVERTER



Capacity 15A 125V AC; 10A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Lever nickel-plated brass
 Terminal type faston 6,3mm
 No. of terminals 6

| Code | Function | Type |
|-------------------|-----------|------|
| 24.5226.00 | ON-ON | DPDT |
| 24.5226.01 | ON-OFF-ON | DPDT |


UNIPOLAR BALANCER SUBMINIATURE DIVERTER WITH FIXING SUPPORT



Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1000V AC
 operating temperature -25~+85 °C
 Terminal type To weld
 No. of terminals 3

| Code | Function | Type | Button |
|-------------------|-----------|------|--------|
| 24.5100.00 | ON-ON | SPDT | Nero |
| 24.5100.10 | ON-OFF-ON | SPDT | Nero |



UNIPOLAR BALANCER SUBMINIATURE DIVERTER WITH FIXING SUPPORT



Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1000V AC
 operating temperature -25~+85 °C
 Terminal type C.S.
 No. of terminals 3

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5100.50 | ON-ON | DPDT | Black |



BIPOLAR BALANCER SUBMINIATURE DIVERTER WITH FIXING SUPPORT



Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1000V AC
 operating temperature -25~+85 °C
 Terminal type To weld
 No. of terminals 6

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5100.30 | ON-ON | DPDT | Nero |



BIPOLAR BALANCER SUBMINIATURE DIVERTER WITH FIXING SUPPORT



Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1000V AC
 operating temperature -25~+85 °C
 Terminal type C.S.
 No. of terminals 6

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5100.60 | ON-ON | DPDT | Nero |


UNIPOLAR MINIATURE DIVERTER WITH BALANCER WITH FIXING SUPPORT



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25~+85 °C
 Terminal type To weld
 No. of terminals 3

| Code | Function | Type | Button |
|-------------------|-----------|------|--------|
| 24.5120.00 | ON-ON | SPDT | Nero |
| 24.5120.05 | ON-OFF-ON | SPDT | Nero |


MINIATURE BIPOLAR DIVERTER WITH BALANCER WITH FIXING SUPPORT



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25~+85 °C
 Terminal type C.S.
 No. of terminals 6

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5120.30 | ON-ON | DPDT | Nero |


UNIPOLAR MINIATURE DIVERTER WITH BALANCER WITH FIXING SUPPORT



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25~+85 °C
 Terminal type C.S.
 No. of terminals 3

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5120.20 | ON-ON | SPDT | Nero |



UNIPOLAR BALANCER SUBMINIATURE SWITCH

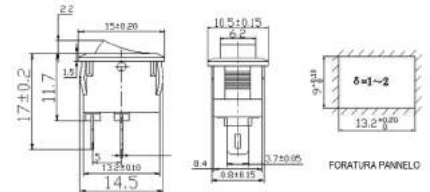

Capacity 3A 125V AC; 1A 250V AC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing Point
 No. of terminals 2

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5110.00 | ON-OFF | SPST | Nero |


MINIATURE BIPOLAR DIVERTER WITH BALANCER WITH FIXING SUPPORT



Capacity 6A 125V AC; 3A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25~+85 °C
 Terminal type To weld
 No. of terminals 6

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5120.10 | ON-ON | DPDT | Nero |


UNIPOLAR BALANCER SUBMINIATURE SWITCH



Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing Punto
 No. of terminals 2

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5110.50 | ON-OFF | SPST | Nero |


UNIPOLAR BALANCER SUBMINIATURE DIVERTER

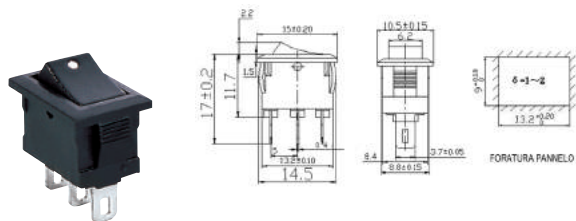

Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing Point
 No. of terminals 3

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5110.10 | ON-ON | SPDT | Black |


UNIPOLAR BALANCER SUBMINIATURE DIVERTER

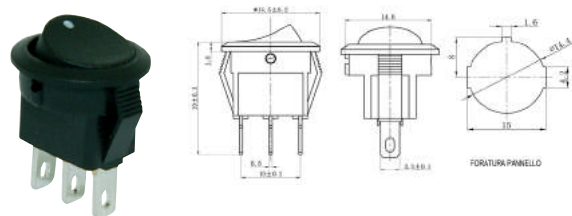

Capacity 3A 125V AC; 1,5A 250V AC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing Point
 No. of terminals 3

| Code | Function | Type | Button |
|-------------------|----------|------|--------|
| 24.5110.70 | ON-ON | SPDT | Black |


12V UNIPOLAR LIGHT BALANCE SUBMINIATURE SWITCH

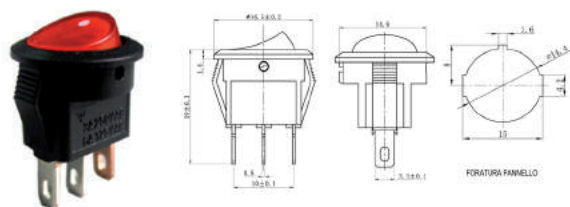

Capacity 5A-12Vdc
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing I 0
 No. of terminals 3

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.5111.00 | Bright Red | ON-OFF | SPST |
| 24.5111.10 | Bright Yellow | ON-OFF | SPST |
| 24.5111.20 | Bright Green | ON-OFF | SPST |
| 24.5111.30 | Bright Blue | ON-OFF | SPST |


UNIPOLAR LIGHT BALANCE SUBMINIATURE SWITCH 230V

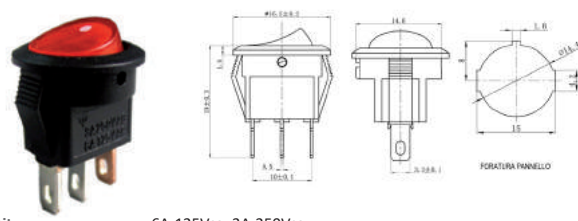

Capacity 6A-125Vca; 3A-250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing I 0
 No. of terminals 3

| Code | Function | Type | Button |
|-------------------|---------------|--------|--------|
| 24.5110.60 | Bright Red | ON-OFF | SPST |
| 24.5110.62 | Bright Yellow | ON-OFF | SPST |
| 24.5110.64 | Bright Green | ON-OFF | SPST |
| 24.5110.66 | Bright Blue | ON-OFF | SPST |

SINGLE-POLE SWITCH WITH BALANCER

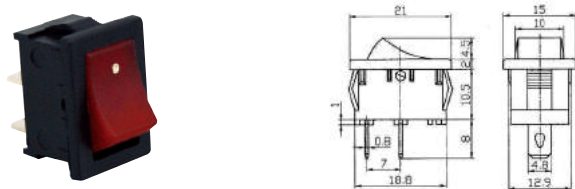


Capacity 10A 125V AC; 6A 250V AC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 4,8mm
 Screen printing Point
 No. of terminals 2




| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2333.00 | Red | ON-OFF | SPST |
| 24.2333.02 | White | ON-OFF | SPST |
| 24.2333.04 | Black | ON-OFF | SPST |

SINGLE-POLE SWITCH WITH BALANCER

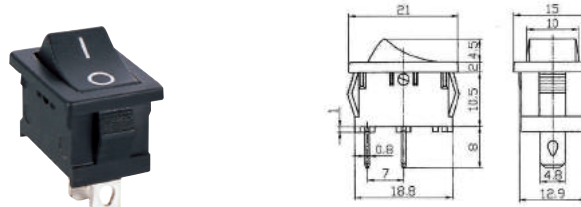


Capacity 10A 125V AC; 6A 250V AC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 4,8mm
 Screen printing I 0
 No. of terminals 2



| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2333.10 | Black | ON-OFF | SPST |


■ 12V LIGHT BALANCE SINGLE POLE SWITCH

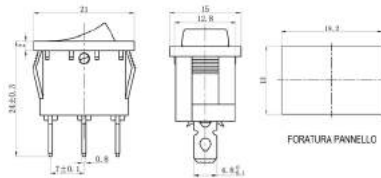

| | |
|----------------------|--------------|
| Portata | 15A-12Vdc |
| Resistenza contatto | 50 mΩ max |
| Rigidità dielettrica | >1500 Vac/5s |
| Temp. esercizio | -25 ~+85 °C |
| Terminali | To weld |
| Serigrafia | I 0 |
| N.Terminali | 3 |

| Codice | Tasto | Funzione | Tipo |
|-------------------|---------------|----------|------|
| 24.5520.00 | Bright Red | ON-OFF | SPST |
| 24.5520.10 | Bright Blue | ON-OFF | SPST |
| 24.5520.20 | Bright Green | ON-OFF | SPST |
| 24.5520.30 | Bright Yellow | ON-OFF | SPST |

■ BIPOLAR ROCKER SWITCH



| | |
|--------------------------|-------------------------|
| Portata | 10A 125V AC; 6A 250V AC |
| Resistenza di contatto | 35mΩ max |
| Rigidità dielettrica | 1 Minute 1500V AC |
| Temperatura di esercizio | -25°C~+85°C |
| Tipo terminali | faston 4,8mm |
| Serigrafia | I 0 |
| N. terminali | 4 |

| Codice | Tasto | Funzione | Tipo |
|-------------------|-------|----------|------|
| 24.2335.00 | Red | ON-OFF | DPST |
| 24.2335.02 | White | ON-OFF | DPST |
| 24.2335.04 | Black | ON-OFF | DPST |


■ SINGLE POLE SWITCH WITH LUMINOUS BALANCER



| | |
|-----------------------|-------------------------|
| Capacity | 10A 125V AC; 6A 250V AC |
| Contact resistance | 35mΩ max |
| Dielectric strength | 1 Minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Terminal type | faston 4,8mm |
| No. of terminals | 3 |

| Code | Button | Function | Type |
|-------------------|------------|----------|------|
| 24.2060.10 | Bright Red | ON-OFF | SPST |


■ BIPOLAR LIGHT BALANCE SWITCH 230V

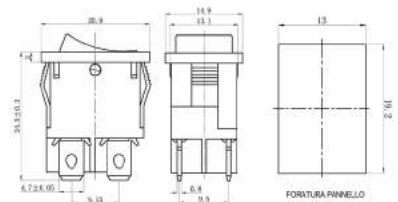

| | |
|-----------------------|-----------------------|
| Capacity | 10A 125Vca; 6A 250Vca |
| Contact resistance | 50 mΩ max |
| Dielectric strength | >1500 Vac/5s |
| operating temperature | -25 ~+85 °C |
| Terminal type | To weld |
| Screen printing | I 0 |
| No. of terminals | 4 |

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2336.00 | Bright Red | ON-OFF | DPST |
| 24.2336.02 | Bright Green | ON-OFF | DPST |
| 24.2336.04 | Bright Yellow | ON-OFF | DPST |
| 24.2336.06 | Bright Blue | ON-OFF | DPST |

■ SINGLE POLE SWITCH WITH LIGHT BALANCE 230V

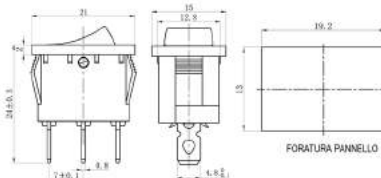

| | |
|-----------------------|-----------------------|
| Capacity | 10A 125Vca; 6A 250Vca |
| Contact resistance | 50 mΩ max |
| Dielectric strength | >1500 Vac/5s |
| operating temperature | -25 ~+85 °C |
| Terminal type | a saldare |
| Screen printing | I 0 |
| No. of terminals | 3 |



| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2061.50 | Bright Red | ON-OFF | SPST |
| 24.2061.60 | Bright Blue | ON-OFF | SPST |
| 24.2061.52 | Bright Green | ON-OFF | SPST |
| 24.2061.54 | Bright Yellow | ON-OFF | SPST |

■ UNIPOLAR DIVERTER WITH BALANCER




| | |
|-----------------------|-------------------------|
| Capacity | 10A 125V AC; 6A 250V AC |
| Contact resistance | 35mΩ max |
| Dielectric strength | 1 Minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Terminal type | faston 4,8mm |
| Screen printing | Point |
| No. of terminals | 3 |

| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2334.00 | Red | ON-ON | SPDT |
| 24.2334.02 | White | ON-ON | SPDT |
| 24.2334.04 | Black | ON-ON | SPDT |

UNIPOLAR DIVERTER WITH BALANCER



| | |
|-----------------------|-------------------------|
| Capacity | 10A 125V AC; 6A 250V AC |
| Contact resistance | 35mΩ max |
| Dielectric strength | 1 Minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Terminal type | faston 4,8mm |
| Screen printing | I 0 II |
| No. of terminals | 3 |

| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2334.10 | Black | ON-ON | SPDT |

UNIPOLAR DIVERTER WITH BALANCER



| | |
|-----------------------|-------------------------|
| Capacity | 10A 125V AC; 6A 250V AC |
| Contact resistance | 35mΩ max |
| Dielectric strength | 1 Minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Terminal type | faston 4,8mm |
| Screen printing | I 0 II |
| No. of terminals | 3 |

| Code | Button | Function | Type |
|-------------------|--------|-----------|------|
| 24.2334.50 | Red | ON-OFF-ON | SPDT |
| 24.2334.52 | White | ON-OFF-ON | SPDT |
| 24.2334.54 | Black | ON-OFF-ON | SPDT |


SINGLE-POLE SWITCH WITH BALANCER


| | |
|-----------------------|-------------------------|
| Capacity | 10A 125V AC; 6A 250V AC |
| Contact resistance | 35mΩ max |
| Dielectric strength | 1 Minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Terminal type | faston 4,8mm |
| Screen printing | 2 |
| No. of terminals | |

| Codice | Tasto | Funzione | Tipo |
|-------------------|-------|----------|------|
| 24.2340.00 | Red | ON-OFF | SPST |
| 24.2340.02 | Black | ON-OFF | SPST |


SINGLE-POLE SWITCH WITH BALANCER


Montaggio



| | |
|-----------------------|---------------------------|
| Capacity | 13A 125V AC; 6,5A 250V AC |
| Contact resistance | 50mΩ max |
| Dielectric strength | 1 Minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Terminal type | faston 4,8mm |
| Screen printing | I 0 |
| No. of terminals | 3 |


| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2340.50 | Red | ON-OFF | SPDT |
| 24.2340.52 | White | ON-OFF | SPDT |
| 24.2340.54 | Black | ON-OFF | SPDT |

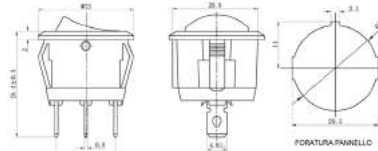12V LIGHT BALANCE SINGLE POLE SWITCH



FORATURA PANNELLO

| | |
|-----------------------|--------------|
| Capacity | 15A-12Vdc |
| Contact resistance | 50 mΩ max |
| Dielectric strength | >1500 Vac/5s |
| operating temperature | -25 ~+85 °C |
| Terminal type | To weld |
| Screen printing | I 0 |
| No. of terminals | 3 |

| Codice | Tasto | Funzione | Tipo |
|-------------------|---------------|----------|------|
| 24.2337.00 | Bright Red | ON-OFF | SPST |
| 24.2337.10 | Bright Blu | ON-OFF | SPST |
| 24.2337.20 | Bright Green | ON-OFF | SPST |
| 24.2337.30 | Bright Yellow | ON-OFF | SPST |

SINGLE POLE SWITCH WITH LUMINOUS BALANCER


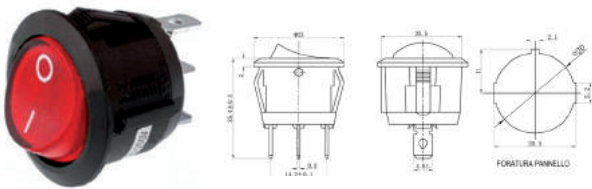
Montaggio



| | |
|-----------------------|-------------------------|
| Capacity | 10A 125V AC; 6A 250V AC |
| Contact resistance | 35mΩ max |
| Dielectric strength | 1 Minute 1500V AC |
| operating temperature | -25°C~+85°C |
| Terminal type | faston 4,8mm |
| No. of terminals | 3 |

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2340.10 | Bright Red | ON-OFF | SPST |
| 24.2340.12 | Bright Green | ON-OFF | SPST |
| 24.2340.14 | Bright Yellow | ON-OFF | SPST |
| 24.2340.16 | Bright Blu | ON-OFF | SPST |


■ SINGLE POLE SWITCH WITH LIGHT BALANCE 230V



Capacity 10A 125Vca; 6A 250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing I 0
 No. of terminals 3

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2340.60 | Bright Red | ON-OFF | SPST |
| 24.2340.66 | Bright Blu | ON-OFF | SPST |
| 24.2340.64 | Bright Green | ON-OFF | SPST |
| 24.2340.68 | Bright Yellow | ON-OFF | SPST |


■ SINGLE POLE SWITCH WITH LIGHT BALANCE 230V

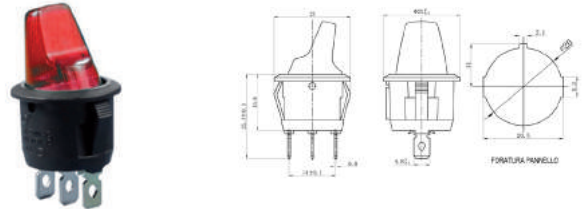

Capacity 10A 125Vca; 6A 250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing I 0
 No. of terminals 3

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2343.00 | Bright Red | ON-OFF | SPST |
| 24.2343.10 | Bright Blu | ON-OFF | SPST |
| 24.2343.20 | Bright Green | ON-OFF | SPST |
| 24.2343.30 | Bright Yellow | ON-OFF | SPST |


■ BIPOLAR ROCKER SWITCH

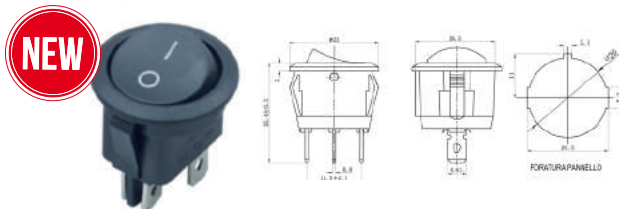

Capacity 10A 125Vca; 6A 250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing I 0
 No. of terminals 4

| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2340.70 | Black | ON-OFF | DPST |


■ SINGLE POLE SWITCH WITH LIGHT BALANCE 230V

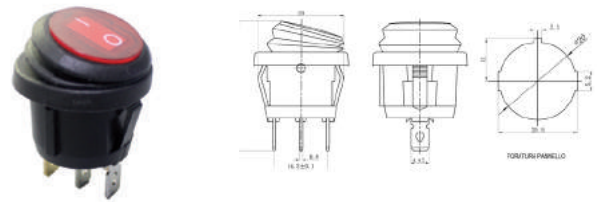

Capacity 10A 125Vca; 6A 250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing I 0
 No. of terminals 3

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2345.00 | Bright Red | ON-OFF | SPST |
| 24.2345.10 | Bright Blu | ON-OFF | SPST |
| 24.2345.20 | Bright Green | ON-OFF | SPST |
| 24.2345.30 | Bright Yellow | ON-OFF | SPST |


■ RED LIGHT BIPOLAR SWITCH 230V

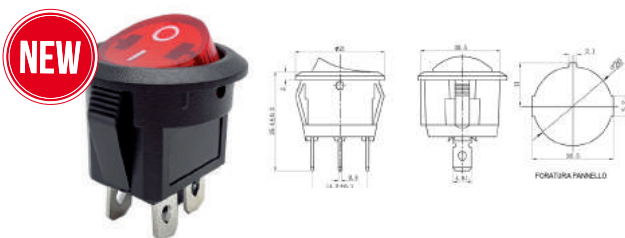


Capacity 10A 125Vca; 6A 250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type To weld
 Screen printing I 0
 No. of terminals 4

| Code | Button | Function | Type |
|-------------------|------------|----------|------|
| 24.2340.72 | Bright Red | ON-OFF | DPST |

■ UNIPOLAR DIVERTER WITH BALANCER

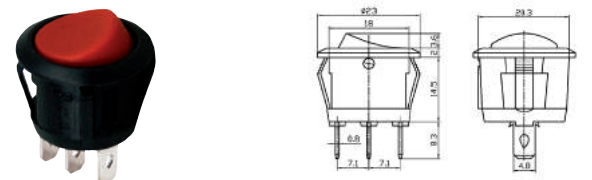


Capacity 10A 125V AC; 6A 250V AC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 4,8mm
 No. of terminals 3



| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2341.00 | Red | ON-ON | SPDT |
| 24.2341.02 | Black | ON-ON | SPDT |


UNIPOLAR DIVERTER WITH BALANCER

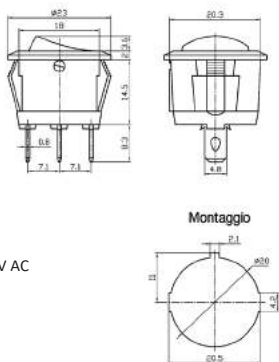

Capacity 10A 125V AC; 6A 250V AC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 4,8mm
 No. of terminals 3

| Code | Button | Function | Type |
|-------------------|--------|-----------|------|
| 24.2342.00 | Red | ON-OFF-ON | SPDT |
| 24.2342.02 | Black | ON-OFF-ON | SPDT |


UNIPOLAR DIVERTER WITH BALANCER



Capacity 13A 125V AC; 6,5A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 4,8mm
 Screen printing I 0 II
 No. of terminals 3

| Code | Button | Function | Type |
|-------------------|--------|-----------|------|
| 24.2342.10 | Black | ON-OFF-ON | SPDT |

BIPOLAR DIVERTER WITH BALANCER



Capacity 13A 125V AC; 6,5A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 4,8mm
 Screen printing I 0 II
 No. of terminals 6

| Code | Button | Function | Type |
|-------------------|--------|-----------|------|
| 24.2342.20 | Black | ON-OFF-ON | SPDT |


SINGLE POLE SWITCH WITH MOMENTARY BALANCER



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 2

| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2065.00 | Red | OFF-(ON) | SPST |
| 24.2065.10 | White | OFF-(ON) | SPST |
| 24.2065.20 | Black | OFF-(ON) | SPST |


SINGLE-POLE SWITCH WITH BALANCER



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 2

| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2066.00 | Red | ON-OFF | SPST |
| 24.2066.10 | White | ON-OFF | SPST |
| 24.2066.20 | Black | ON-OFF | SPST |


SINGLE POLE SWITCH WITH LIGHT BALANCE 230V



Capacity 20A-125Vca; 15A-250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type faston 6,3 mm
 Screen printing I 0
 No. of terminals 3

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2302.00 | Bright Red | ON-OFF | SPST |
| 24.2302.10 | Bright yellow | ON-OFF | SPST |
| 24.2302.20 | Bright Green | ON-OFF | SPST |
| 24.2302.30 | Bright Blu | ON-OFF | SPST |


■ UNIPOLAR DIVERTER WITH BALANCER



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0 II
 No. of terminals 3

| Code | Button | Function | Type |
|-------------------|--------|-----------|------|
| 24.2068.00 | Red | ON-OFF-ON | SPDT |
| 24.2068.10 | White | ON-OFF-ON | SPDT |
| 24.2068.20 | Black | ON-OFF-ON | SPDT |

■ BIPOLAR LIGHT BALANCE SWITCH 230V

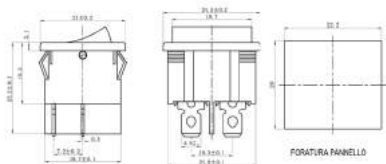

Capacity 10A 125Vca; 6A 250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type faston 4,8 mm
 Screen printing I 0
 No. of terminals 4

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2347.00 | Bright Red | ON-OFF | DPST |
| 24.2347.10 | Bright yellow | ON-OFF | DPST |
| 24.2347.20 | Bright Green | ON-OFF | DPST |
| 24.2347.30 | Bright Blu | ON-OFF | DPST |


■ BIPOLAR ROCKER SWITCH



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 4

| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2306.00 | Red | ON-OFF | DPST |
| 24.2306.20 | Black | ON-OFF | DPST |


■ 12V BIPOLAR LIGHT BALANCE SWITCH

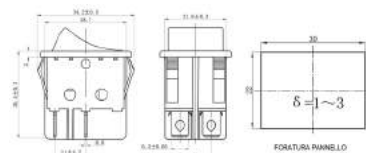

Capacity 20A -12V
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type faston 6,3 mm
 Screen printing I 0
 No. of terminals 4

| Codice | Tasto | Funzione | Tipo |
|-------------------|---------------|----------|------|
| 24.2315.00 | Bright Red | ON-OFF | DPST |
| 24.2315.10 | Bright yellow | ON-OFF | DPST |
| 24.2315.20 | Bright Green | ON-OFF | DPST |
| 24.2315.30 | Bright Blu | ON-OFF | DPST |

■ BIPOLAR LIGHT BALANCE SWITCH 230V

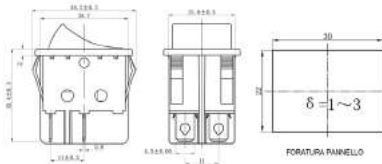

Capacity 10A 125Vca; 15A 250Vca
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/5s
 operating temperature -25 ~+85 °C
 Terminal type faston 6,3 mm
 Screen printing I 0
 No. of terminals 4

| Code | Button | Function | Type |
|-------------------|---------------|----------|------|
| 24.2310.00 | Bright Red | ON-OFF | DPST |
| 24.2310.10 | Bright Green | ON-OFF | DPST |
| 24.2310.20 | Bright yellow | ON-OFF | DPST |
| 24.2310.30 | Bright Blu | ON-OFF | DPST |



■ DOUBLE SWITCH UNIPOLAR WITH BALANCER



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 4

| Code | Button | Function | Type |
|-------------------|--------|----------|------|
| 24.2520.00 | Red | ON-OFF | DPST |
| 24.2520.10 | White | ON-OFF | DPST |
| 24.2520.20 | Green | ON-OFF | DPST |


DOUBLE SWITCH SINGLE POLE WITH LUMINOUS BALANCER 220V



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 6

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.2510.00 | Bright Red | ON-OFF | DPST |
| 24.2510.10 | Bright Green | ON-OFF | DPST |


BIPOLAR DIVERTER WITH BALANCER



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0 II
 No. of terminals 6

| Code | Button Color | Function | Type |
|--------------------|--------------|---------------|------|
| 24.2205.00 | Red | ON-OFF-ON | DPDT |
| 24.2205.10 | White | ON-OFF-ON | DPDT |
| 24.2205.20 | Black | ON-OFF-ON | DPDT |
| *24.2205.25 | Black | (ON)-OFF-(ON) | DPDT |



DOUBLE SWITCH SINGLE POLE WITH LUMINOUS BALANCER 220V



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 6

| Code | Button Color | Function | Type |
|-------------------|------------------|----------|------|
| 24.2510.20 | Bright Red+Green | ON-OFF | DPST |


DOUBLE DIVERTER UNIPOLAR WITH BALANCER



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 6

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.2550.00 | Red | ON-ON | DPDT |
| 24.2550.10 | White | ON-ON | DPDT |
| 24.2550.20 | Green | ON-ON | DPDT |


BIPOLAR DIVERTER WITH BALANCER



Capacity 20A 125V AC; 15A 250V AC; 35A 12VDC
 Contact resistance 35mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 6

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.2201.00 | Red | ON-ON | DPDT |


MOMENTARY BIPOLAR BUTTON SWITCH



Capacity 16A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 Minute 1500V AC
 operating temperature -25°C~+85°C
 Terminal type faston 6,3mm
 Screen printing I 0
 No. of terminals 4

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.2090.00 | Black | OFF-(ON) | DPDT |

■ **MINIATURE SWITCH WITH MOMENTARY BUTTON**

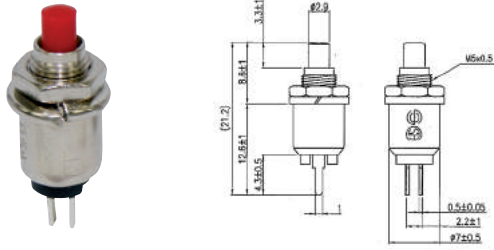


Capacity 0.5A 125/250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 Minute 1000V AC
 operating temperature 500V DC 100MΩ min
 Terminal type To weld
 Contact Normally open
 No. of terminals 2



| Code | Button Color | Function | Type |
|------------|--------------|----------|------|
| 24.0345.00 | Red | OFF-(ON) | SPST |
| 24.0345.02 | Black | OFF-(ON) | SPST |

■ **MINIATURE SWITCH WITH MOMENTARY BUTTON**

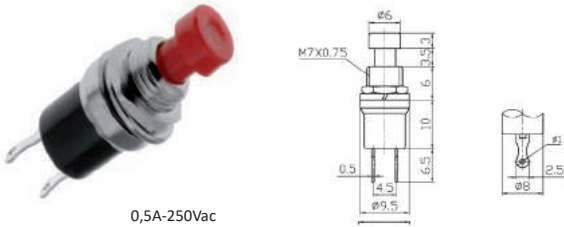


Capacity 0,5A-250Vac
 Contact resistance 50 mΩ max
 Dielectric strength >1500 Vac/1min
 operating temperature normalmente aperto
 Terminal type To weld
 No. of terminals 2



| Code | Button Color | Function | Type |
|------------|--------------|----------|------|
| 24.0346.00 | Red | OFF-(ON) | SPST |
| 24.0346.02 | Yellow | OFF-(ON) | SPST |
| 24.0346.04 | Green | OFF-(ON) | SPST |
| 24.0346.06 | Blu | OFF-(ON) | SPST |
| 24.0348.00 | Black | OFF-(ON) | SPST |

■ **MINIATURE SWITCH WITH MOMENTARY BUTTON**

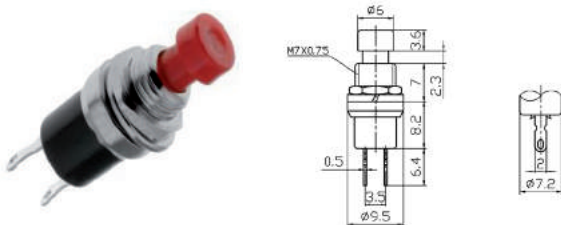


Capacity 3A 125V AC; 1A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1000V AC
 operating temperature -25°C~+85°C
 Terminal type To weld
 Contact Normally open
 No. of terminals 2



| Code | Button Color | Function | Type |
|------------|--------------|----------|------|
| 24.0349.00 | Red | ON-(OFF) | SPST |
| 24.0349.02 | Black | ON-(OFF) | SPST |

■ **MOMENTARY BUTTON SWITCH**

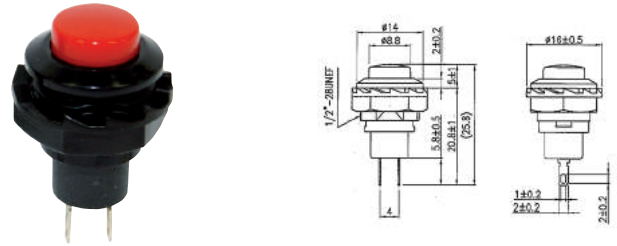


Capacity 3A 125V AC; 1.5A 250V AC
 Contact resistance 50mΩ max
 Dielectric strength 1 Minute 1000V AC
 operating temperature To weld
 Terminal type Normally open
 No. of terminals 2



| Code | Button Color | Function | Type |
|------------|--------------|----------|------|
| 24.0528.00 | Red | OFF-(ON) | SPST |
| 24.0528.02 | Black | OFF-(ON) | SPST |

■ **2-POLE OFF- (ON) RED MOMENTARY BUTTON SWITCH**

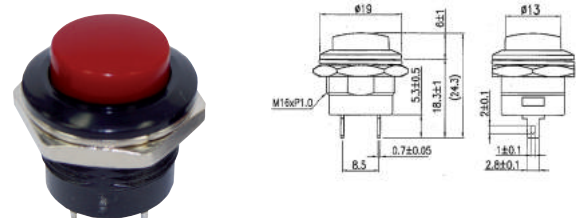


Capacity 3A-250Vac
 Contact resistance 50mΩ max
 Dielectric strength 1500Vac/1 min.
 operating temperature To weld
 Terminal type Normally open
 No. of terminals 2



| Code | Button Color | Function | Type |
|------------|--------------|----------|------|
| 24.0353.00 | Red | OFF-(ON) | SPST |
| 24.0353.02 | Black | OFF-(ON) | SPST |

■ **MOMENTARY BUTTON SWITCH**

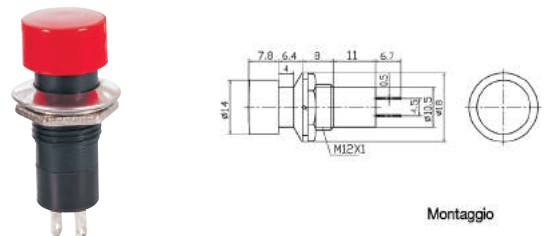


Capacity 3A 125V AC; 1A 250V AC
 Contact resistance 20mΩ max
 Dielectric strength 1 Minute 1000V AC
 operating temperature -25°C~+85°C
 Terminal type To weld
 Contact Normally open
 No. of terminals 2



| Code | Button Color | Function | Type |
|------------|--------------|----------|------|
| 24.0342.00 | Red | OFF-(ON) | SPST |
| 24.0343.00 | Black | OFF-(ON) | SPST |

MOMENTARY BUTTON SWITCH OFF- (ON) 2 POLES RED




Montaggio



| | |
|-----------------------|---------------|
| Capacity | 1A-250Vac |
| Contact resistance | 50mΩ max |
| Dielectric strength | 1500Vac/1 min |
| operating temperature | -25°C~+85°C |
| Terminal type | To weld |
| Contact | Normally Open |
| No. of terminals | 2 |

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.0550.00 | Red | OFF-(ON) | SPST |
| 24.0550.02 | Black | OFF-(ON) | SPST |
| 24.0550.04 | White | OFF-(ON) | SPST |
| 24.0550.06 | Yellow | OFF-(ON) | SPST |
| 24.0550.08 | Green | OFF-(ON) | SPST |
| 24.0550.10 | Blu | OFF-(ON) | SPST |

MOMENTARY BUTTON SWITCH OFF- (ON) 2 POLES RED




Montaggio




| | |
|-----------------------|---------------|
| Capacity | 1A-250Vac |
| Contact resistance | 50mΩ max |
| Dielectric strength | 1500Vac/1 min |
| operating temperature | -25°C~+85°C |
| Terminal type | To weld |
| Contact | Normally Open |
| No. of terminals | 2 |

| Codice | Tasto | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.0350.00 | Red | OFF-(ON) | SPST |
| 24.0350.02 | Black | OFF-(ON) | SPST |
| 24.0350.04 | Yellow | OFF-(ON) | SPST |
| 24.0350.06 | Green | OFF-(ON) | SPST |
| 24.0350.08 | Blu | OFF-(ON) | SPST |

2-POLE OFF- (ON) RED MOMENTARY BUTTON SWITCH



Montaggio



| | |
|-----------------------|----------------|
| Capacity | 3A-250Vac |
| Contact resistance | 50mΩ max |
| Dielectric strength | 1500Vac/1 min. |
| operating temperature | -25°C~+85°C |
| Terminal type | To weld |
| Contact | Normally Open |
| No. of terminals | 2 |

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.0560.00 | Red | OFF-(ON) | SPST |
| 24.0560.02 | Black | OFF-(ON) | SPST |
| 24.0560.04 | Yellow | OFF-(ON) | SPST |
| 24.0560.06 | Green | OFF-(ON) | SPST |
| 24.0560.08 | Blu | OFF-(ON) | SPST |


MOMENTARY OFF- (ON) BUTTON SWITCH WITH 3V LED




| | |
|-----------------------|--|
| Capacity | 3A-250Vac |
| Contact resistance | 100mΩ max |
| Dielectric strength | 500Vac/1 min |
| operating temperature | -25°C~+85°C |
| Terminal type | 2 per contatti + 2 per alimentazione LED |
| Contact | To weld |
| Terminal Type | Normally Open |

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.5750.10 | Red | OFF-(ON) | SPST |
| 24.5750.12 | Green | OFF-(ON) | SPST |
| 24.5750.14 | Yellow | OFF-(ON) | SPST |
| 24.5750.16 | Blu | OFF-(ON) | SPST |

2-POLE ON- (OFF) RED MOMENTARY BUTTON SWITCH




Montaggio



| | |
|-----------------------|-----------------|
| Capacity | 3A-250Vac |
| Contact resistance | 50mΩ max |
| Dielectric strength | 1500Vac/1 min. |
| operating temperature | -25°C~+85°C |
| Terminal type | To weld |
| Contact | Normally closed |
| No. of terminals | 2 |

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.0570.00 | Red | ON-(OFF) | SPST |
| 24.0570.02 | Black | ON-(OFF) | SPST |

STABLE BUTTON SWITCH

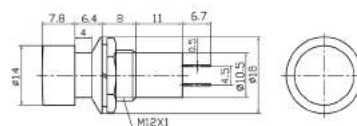


Montaggio



| | |
|-----------------------|------------------------|
| Capacity | 3A 125V AC; 1A 250V AC |
| Contact resistance | 20mΩ max |
| Dielectric strength | 1 minuto 1000V AC |
| operating temperature | -25°C~+85°C |
| Terminal type | To weld |
| No. of terminals | 2 |

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.0526.00 | Red | ON-OFF | SPST |
| 24.0526.02 | Black | ON-OFF | SPST |

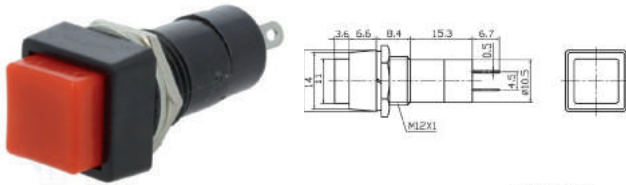■ STABLE ON-OFF 2-POLE RED BUTTON SWITCH


| | |
|-----------------------|---------------|
| Capacity | 1A-250Vac |
| Contact resistance | 50mΩ max |
| Dielectric strength | 1500Vac/1 min |
| operating temperature | -25°C~+85°C |
| Terminal type | a saldare |
| No. of terminals | 2 |


Montaggio


| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.0527.00 | Red | ON-OFF | SPST |
| 24.0527.02 | Black | ON-OFF | SPST |
| 24.0527.04 | Yellow | ON-OFF | SPST |
| 24.0527.06 | Green | ON-OFF | SPST |
| 24.0527.08 | Blu | ON-OFF | SPST |

■ RED ON-OFF STABLE BUTTON SWITCH WITH 3V LED



| | |
|-----------------------|---|
| Capacity | 3A-250Vac |
| Contact resistance | 100mΩ max |
| Dielectric strength | 500Vac/1 min |
| operating temperature | -25°C~+85°C |
| Terminal type | 2 for contacts + 2 for LED power supply |
| No. of terminals | To weld |

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.5750.00 | Red | ON-OFF | SPST |
| 24.5750.02 | Green | ON-OFF | SPST |
| 24.5750.04 | Yellow | ON-OFF | SPST |
| 24.5750.06 | Blu | ON-OFF | SPST |

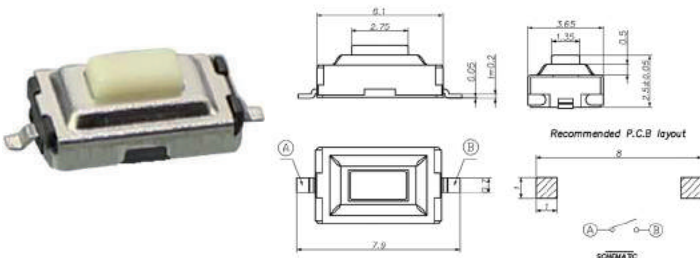■ MICRO-BUTTON FROM CS SMD


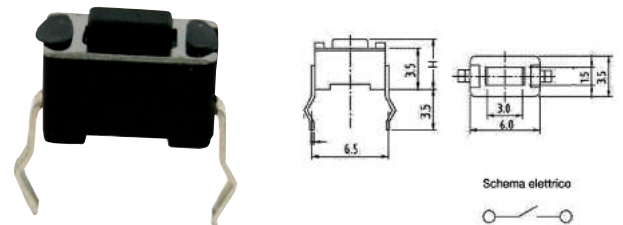
| | |
|-----------------------|-------------|
| Capacity | 12V DC 50mA |
| Contact resistance | 50mΩ max |
| operating temperature | smd |
| No. of terminals | 160±30g |
| Terminal type | 2 |

| Code | Dimension H | Button Color |
|-------------------|-------------|--------------|
| 24.0860.15 | 3.0 mm | White |

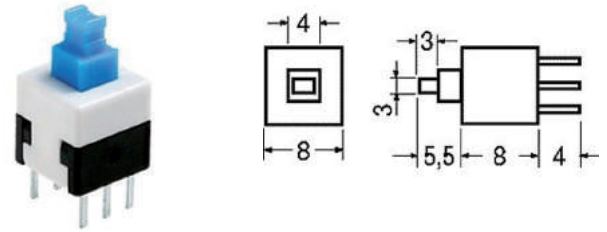■ BIPOLAR BUTTON MICRODEVIATOR


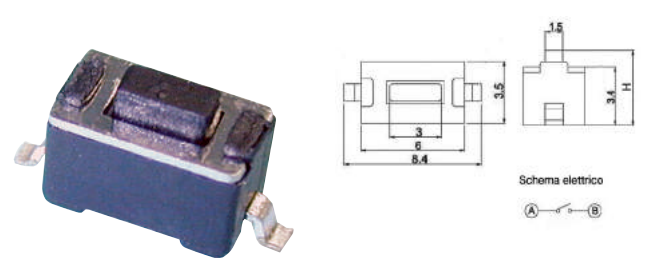
| | |
|-----------------------|--------------|
| Capacity | 0,3A - 30VCC |
| Contact resistance | 30mΩ a 1A |
| operating temperature | -25°C~+85°C |
| No. of terminals | 6 |
| Terminal type | C.S. |

| Code | Function | Type |
|-------------------|----------|------|
| 24.0880.50 | ON-ON | DPDT |
| 24.0880.10 | ON-(ON) | DPDT |

■ MICRO-BUTTON FROM CS 6X3.5


| | |
|-----------------------|------------|
| Capacity | 12Vdc-50mA |
| Contact resistance | 100mΩ max |
| operating temperature | da c.s. |
| No. of terminals | 180±30g |
| Terminal type | 2 |


| Code | Dimension H | Button Color |
|-------------------|-------------|--------------|
| 24.0879.00 | 4,3 mm | Black |
| 24.0879.50 | 5,0 mm | Black |

■ MICRO-BUTTON FROM CS


| | |
|-----------------------|-------------|
| Capacity | 12V DC 50mA |
| Contact resistance | 50mΩ max |
| operating temperature | smd |
| No. of terminals | 160±30g |
| Terminal type | 2 |

| Code | Dimension H | Button Color |
|-------------------|-------------|--------------|
| 24.0860.18 | 4,3 mm | Black |
| 24.0860.19 | 5,0 mm | Black |



MICRO-BUTTON FROM CS

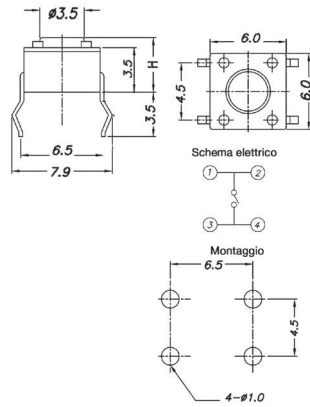

Capacity 12V DC 50mA
 Contact resistance 50mΩ max
 operating temperature da c.s.
 No. of terminals 160±30g
 Terminal type 4

| Code | Dimension H | Button Color |
|-------------------|-------------|--------------|
| 24.0860.00 | 4,3 mm | Nero |
| 24.0860.05 | 5,0 mm | Nero |
| 24.0860.10 | 9,5 mm | Nero |


MICRO-BUTTON FROM CS

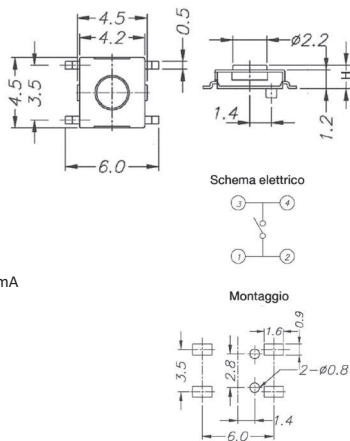

Capacity 12V DC 50mA
 Contact resistance 50mΩ max
 operating temperature smd
 Terminal type 160±30g
 No. of terminals 4

| Code | Dimension H | Button Color |
|-------------------|-------------|--------------|
| 24.0860.17 | 4,3 mm | Nero |


MICRO-BUTTON FROM CS

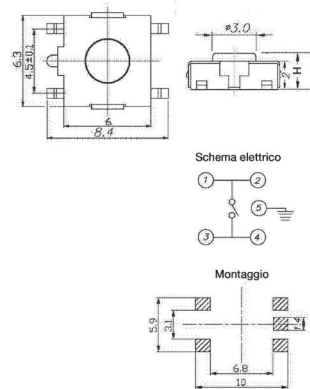

Capacity 12V DC 50mA
 Contact resistance 100mΩ max
 operating temperature da c.s.
 Terminal type 160±50g
 No. of terminals 4

| Code | Dimension H | Button Color |
|-------------------|-------------|--------------|
| 24.0870.05 | 4,3 mm | Nero |

ON-OFF BUTTON SWITCH FOR ABAT-JOUR

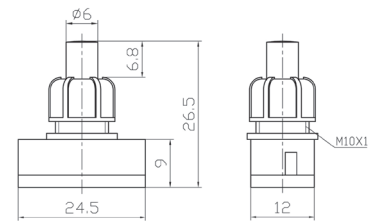

Capacity 2A-250Vac
 Contact resistance 50mΩ max
 Dielectric strength 1 min. 1000V AC
 operating temperature -25°C~+85°C
 No. of terminals a vite
 Terminal type 2

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.0529.10 | Bianco | ON-OFF | SPST |


ROCKER SWITCH



Working voltage 250 Vca
 Max current 4 A
 Material Body thermoplastic
 No. of terminals 2

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.0020.00 | Nero | ON-OFF | SPST |
| 24.0020.05 | Bianco | ON-OFF | SPST |

STABLE BIPOLAR ON-OFF BUTTON SWITCH

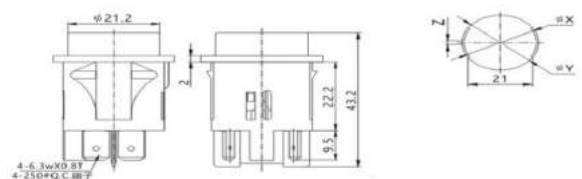

| Code | Button Color | Function | Type |
|-------------------|--------------|----------|------|
| 24.5750.20 | Rosso | ON-OFF | DPDT |



■ VANDAL-PROOF BUTTON 16MM



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 2A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Raised |

Code

24.5700.05

■ VANDAL-PROOF BUTTON 16MM



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 2A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Raised |

Code

24.5700.06

■ 19MM ANTI-VANDAL BUTTON



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Raised |

Code

24.5700.10

■ VANDAL-PROOF BUTTON 16MM



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 2A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Raised |

Code

24.5700.07

■ 19MM ANTI-VANDAL BUTTON



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Raised |

Code

24.5700.30

■ 19MM VANDAL-PROOF BUTTON



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Raised |

Code

24.5700.20

■ 22MM VANDAL BUTTON



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Raised |

Code

24.5700.37

■ 22MM VANDAL BUTTON



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Flat |

Code

24.5700.35

■ VANDAL-PROOF BUTTON SWITCH 16MM



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 4A 250V |
| Body | Stainless steel |
| Connection | To weld |
| No. of Terminal | 3 |
| Socket | 24.5743.00 |

Code

24.5730.95

■ VANDAL-PROOF BUTTON 22MM



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | screw |
| Actuator | Raised |

Code

24.5700.36

■ INTERRUOTTORE A PULSANTE ANTIVANDALO 19MM



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To weld |
| No. of Terminal | 3 |
| Socket | 24.5743.01 |

Code

24.5741.90

■ LUMINOUS VANDAL BUTTON 16MM - 12V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | To weld |
| No. of Terminal | 4 |

| Code | Color | Function | Type |
|-------------------|--------|----------|------|
| 24.5730.00 | Green | OFF-(ON) | SPST |
| 24.5730.10 | Red | OFF-(ON) | SPST |
| 24.5730.20 | Yellow | OFF-(ON) | SPST |
| 24.5730.30 | Blu | OFF-(ON) | SPST |
| 24.5730.40 | White | OFF-(ON) | SPST |

■ LUMINOUS VANDAL BUTTON 19MM - 24V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | To weld |
| No. of Terminal | 4 |

| Code | Color | Function | Type |
|-------------------|--------|----------|------|
| 24.5720.00 | Green | OFF-(ON) | SPST |
| 24.5720.10 | Red | OFF-(ON) | SPST |
| 24.5720.20 | Yellow | OFF-(ON) | SPST |
| 24.5720.30 | Blu | OFF-(ON) | SPST |
| 24.5720.40 | White | OFF-(ON) | SPST |

■ LUMINOUS VANDAL BUTTON 16MM - 24V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | Screw |
| No. of Terminal | 4 |

| Code | Color | Function | Type |
|-------------------|--------|----------|------|
| 24.5730.50 | Green | OFF-(ON) | SPST |
| 24.5730.60 | Red | OFF-(ON) | SPST |
| 24.5730.70 | Yellow | OFF-(ON) | SPST |
| 24.5730.80 | Blu | OFF-(ON) | SPST |
| 24.5730.90 | White | OFF-(ON) | SPST |

■ LUMINOUS VANDAL BUTTON 22MM - 24V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To weld |
| No. of Terminal | 6 |
| Socket | 24.5743.04 |

| Code | Color | Function | Type |
|-------------------|--------|----------|------|
| 24.5731.00 | Green | OFF-(ON) | SPST |
| 24.5731.10 | Red | OFF-(ON) | SPST |
| 24.5731.20 | Yellow | OFF-(ON) | SPST |
| 24.5731.30 | Blu | OFF-(ON) | SPST |
| 24.5731.40 | White | OFF-(ON) | SPST |

■ LUMINOUS VANDAL BUTTON 19MM - 12V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | N.A. |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | Screw |
| No. of Terminal | 4 |

| Code | Color | Function | Type |
|-------------------|--------|----------|------|
| 24.5710.00 | Green | OFF-(ON) | SPST |
| 24.5710.10 | Red | OFF-(ON) | SPST |
| 24.5710.20 | Yellow | OFF-(ON) | SPST |
| 24.5710.30 | Blu | OFF-(ON) | SPST |
| 24.5710.40 | White | OFF-(ON) | SPST |

■ LUMINOUS VANDAL BUTTON 25MM - 24V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 2NA 2NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To weld |
| No. of Terminal | 10 |
| Socket | 24.5743.05 |

| Code | Color | Function | Type |
|-------------------|-------|----------|------|
| 24.5732.10 | Green | OFF-(ON) | SPST |
| 24.5732.20 | Red | OFF-(ON) | SPST |
| 24.5732.30 | White | OFF-(ON) | SPST |

LUMINOUS VANDAL-PROOF BUTTON SWITCH 16MM - 12V


| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5740.00 | Green | ON-(ON) | SPDT |
| 24.5740.10 | Red | ON-(ON) | SPDT |
| 24.5740.20 | Yellow | ON-(ON) | SPDT |
| 24.5740.30 | Blu | ON-(ON) | SPDT |
| 24.5740.40 | White | ON-(ON) | SPDT |

LUMINOUS VANDAL-PROOF BUTTON SWITCH 16MM - 24V


| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |
| Socket | 24.5743.02 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5740.50 | Green | ON-(ON) | SPST |
| 24.5740.60 | Red | ON-(ON) | SPST |
| 24.5740.70 | Yellow | ON-(ON) | SPST |
| 24.5740.80 | Blu | ON-(ON) | SPST |
| 24.5740.90 | White | ON-(ON) | SPST |

LUMINOUS VANDAL-PROOF BUTTON SWITCH 19MM - 12V


| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5741.00 | Green | ON-(ON) | SPDT |
| 24.5741.10 | Red | ON-(ON) | SPDT |
| 24.5741.20 | Yellow | ON-(ON) | SPDT |
| 24.5741.30 | Blu | ON-(ON) | SPDT |
| 24.5741.40 | White | ON-(ON) | SPDT |

LUMINOUS VANDAL-PROOF BUTTON SWITCH 19MM - 24V


| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |
| Socket | 24.5743.03 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5741.55 | Green | ON-(ON) | SPST |
| 24.5741.60 | Red | ON-(ON) | SPST |
| 24.5741.65 | Yellow | ON-(ON) | SPST |
| 24.5741.70 | Blu | ON-(ON) | SPST |
| 24.5741.75 | White | ON-(ON) | SPST |

LUMINOUS VANDAL-PROOF BUTTON SWITCH 19MM - 12V


| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |
| Socket | 24.5743.03 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5742.50 | Blu | ON-(ON) | SPST |
| 24.5742.45 | Rosso | ON-(ON) | SPST |

LUMINOUS VANDAL-PROOF BUTTON SWITCH 19MM - 24V


| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |
| Socket | 24.5743.03 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5742.60 | Blu | ON-(ON) | SPST |
| 24.5742.55 | Red | ON-(ON) | SPST |

■ LUMINOUS VANDAL-PROOF BUTTON SWITCH 19MM - 12V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 3A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5742.00 | Green | ON-(ON) | SPDT |
| 24.5742.10 | Red | ON-(ON) | SPDT |
| 24.5742.20 | Yellow | ON-(ON) | SPDT |
| 24.5742.30 | Blu | ON-(ON) | SPDT |
| 24.5742.40 | White | ON-(ON) | SPDT |

■ LUMINOUS VANDAL-PROOF BUTTON SWITCH 19MM - 24V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |
| Socket | 24.5743.03 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5741.85 | Blu | ON-(ON) | SPST |
| 24.5741.80 | Red | ON-(ON) | SPST |

■ BRIGHT ANTI-VANDAL BUTTON SWITCH 19MM - 12V



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 5 |
| Socket | 24.5743.03 |

| Codice | Colore | Funzione | Tipo |
|-------------------|--------|----------|------|
| 24.5741.50 | Blu | ON-(ON) | SPST |
| 24.5741.45 | Red | ON-(ON) | SPST |

■ MUSHROOM SWITCH SWITCH FOR EMERGENCY 19MM



| | |
|------------------|-----------------|
| Protection Level | IP65 |
| Type | 1NA 1NC |
| Capacity | 5A 250V |
| Body | Stainless steel |
| Connection | To be welded |
| No. of Terminal | 3 |
| Socket | 24.5743.03 |


| Codice |
|-------------------|
| 24.5744.00 |

■ SOCKET FOR ANTI-VANDAL BUTTONS AND SWITCHES



| | |
|------------------------|--|
| Cod. 24.5743.00 | Suitable for Article 24.5730.95 |
| Cod. 24.5743.01 | Suitable for Article: 24.5741.90 |
| Cod. 24.5743.02 | Suitable for Article: 24.5740.50 - 24.5740.60 - 24.5740.70 - 24.5740.80 - 24.5740.90 |
| Cod. 24.5743.03 | Suitable for Article: 24.5741.45 - 24.5741.50 - 24.5741.80 - 24.5741.85 - 24.5742.45 - 24.5742.50 - 24.5742.55 - 24.5742.60 - 24.5741.55 - 24.5741.60 24.5741.65 - 24.5741.70 - 24.5741.75 - 24.5744.00 |
| Cod. 24.5743.04 | Suitable for Article: 24.5731.00 - 24.5731.10 - 24.5731.20 - 24.5731.30 - 24.5731.40 |
| Cod. 24.5743.05 | Suitable for Article: 24.5732.10 - 24.5732.20 - 24.5732.30 |

■ SINGLE-POLE LEVER SWITCH FOR LUMINOUS CAR




Montaggio



| | |
|-----------------------|----------------|
| Capacity | 20A 12VDC |
| Contact Resistance | 50mΩ max |
| dielectric strenght | 1 min 1500V AC |
| operating Temperature | -25°C~+85°C |
| Lever | Plastic |
| Terminal Type | faston 6,3mm |
| No. of Terminal | 3 |

| Code | Lever Color | function | Type |
|-------------------|-------------|----------|------|
| 24.5600.00 | Bright Red | ON-OFF | SPST |

■ SINGLE-POLE LEVER DIVERTER FOR CARS




Montaggio



| | |
|-----------------------|----------------|
| Capacity | 20A 12VDC |
| Contact Resistance | 50mΩ max |
| dielectric strenght | 1 min 1500V AC |
| operating Temperature | -25°C~+85°C |
| Lever | Plastic |
| Terminal Type | faston 6,3mm |
| No. of Terminal | 3 |

| Code | Lever Color | function | Type |
|-------------------|-------------|-----------|------|
| 24.5610.00 | Black | ON-ON | SPDT |
| 24.5610.50 | Black | ON-OFF-ON | SPDT |

■ SINGLE POLE LEVER SWITCH FOR 12V LUMINOUS CAR



Montaggio



| | |
|-----------------------|----------------|
| Capacity | 20A-12Vdc |
| Contact Resistance | 50 mΩ max |
| dielectric strenght | >1500 Vac/1min |
| operating Temperature | -25 ~+85 °C |
| No. of Terminal | 3 |

| Code | Lever Color | function | Type |
|-------------------|-------------|----------|------|
| 24.5620.00 | Red LED | ON-OFF | SPST |
| 24.5620.02 | White LED | ON-OFF | SPST |
| 24.5620.08 | Yellow LED | ON-OFF | SPST |
| 24.5620.04 | Green LED | ON-OFF | SPST |
| 24.5620.06 | Blu LED | ON-OFF | SPST |


■ 12V LUMINOUS LEVER SAFETY SWITCH




| | |
|-----------------------|----------------|
| Capacity | 20A-12Vdc |
| Contact Resistance | 50 mΩ max |
| dielectric strenght | >1500 Vac/1min |
| operating Temperature | -25 ~+85 °C |
| No. of Terminal | 3 |
| Terminal Type | faston 6,3mm |
| Color | Red |

| Code | Lever Color | function | Type |
|-------------------|-------------|----------|------|
| 24.5615.00 | Red LED | ON-OFF | SPST |
| 24.5615.02 | Green LED | ON-OFF | SPST |
| 24.5615.04 | Blu LED | ON-OFF | SPST |

■ UNIPOLAR ROCKER SWITCH FOR CARS




Montaggio




| | |
|-----------------------|----------------|
| Capacity | 16A 12VDC |
| Contact Resistance | 50mΩ max |
| dielectric strenght | 1 min 1500V AC |
| operating Temperature | -25°C~+85°C |
| Terminal Type | faston 4,8mm |
| Screen printing | I 0 |
| No. of Terminal | 2 |

| Code | Button Color | function | Type |
|-------------------|--------------|----------|------|
| 24.5510.00 | Black | ON-OFF | SPST |

■ UNIPOLAR DIVERTER WITH BALANCER FOR CARS




Montaggio



| | |
|-----------------------|----------------|
| Capacity | 16A 12VDC |
| Contact Resistance | 50mΩ max |
| dielectric strenght | 1 min 1500V AC |
| operating Temperature | -25°C~+85°C |
| Terminal Type | faston 4,8mm |
| Screen printing | I 0 II |
| No. of Terminal | 3 |

| Code | Button Color | function | Type |
|-------------------|--------------|-----------|------|
| 24.5510.70 | Black | ON-OFF-ON | SPDT |


UNIPOLAR SWITCH TO BALANCER FOR CAR LUMINOUS 12V

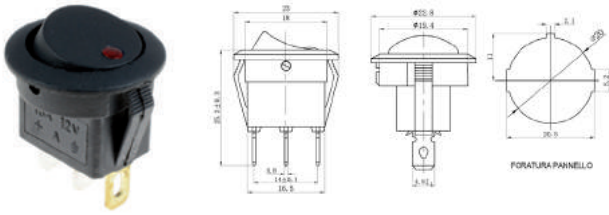

Capacity 16A-12Vdc
 Contact Resistance 50 mΩ max
 dielectric strenght >1500 Vac/5s
 operating Temperature -25 ~+85 °C
 No. of Terminal 3

| Code | Button Color | function | Type |
|-------------------|---------------|----------|------|
| 24.5500.00 | Bright Red | ON-OFF | SPST |
| 24.5500.10 | Bright Green | ON-OFF | SPST |
| 24.5500.20 | Bright Blu | ON-OFF | SPST |
| 24.5500.30 | Bright Yellow | ON-OFF | SPST |


UNIPOLAR SWITCH WITH BALANCER FOR LUMINOUS CAR

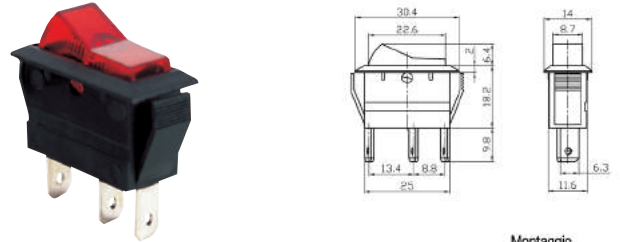

Capacity 20A 12VDC
 Contact Resistance 50mΩ max
 dielectric strenght 1 min 1500V AC
 operating Temperature -25°C~+85°C
 Terminal Type faston 6,3mm

| Code | Button Color | function | Type |
|-------------------|--------------|----------|------|
| 24.5530.00 | Bright Red | ON-OFF | SPST |


UNIPOLAR DIVERTER WITH BALANCER FOR CARS

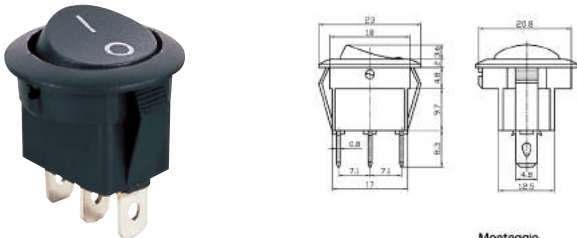

Capacity 16A 12VDC
 Contact Resistance 50mΩ max
 dielectric strenght 1 min 1500V AC
 operating Temperature -25°C~+85°C
 Terminal Type faston 4,8mm
 Screen printing I 0
 No. of Terminal 3

| Code | Button Color | function | Type |
|-------------------|--------------|----------|------|
| 24.5510.50 | Black | ON-ON | SPDT |


UNIPOLAR DIVERTER WITH BALANCER FOR CARS

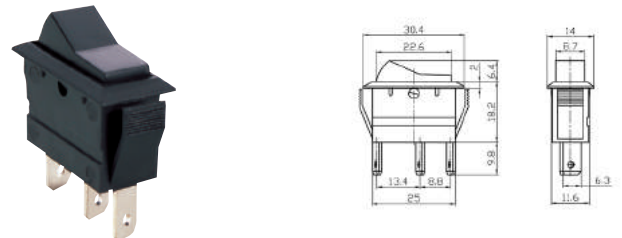

Capacity 20A 12VDC
 Contact Resistance 50mΩ max
 dielectric strenght 1 min 1500V AC
 operating Temperature -25°C~+85°C
 Terminal Type faston 6,3mm

| Code | Button Color | function | Type |
|-------------------|--------------|----------|------|
| 24.5530.50 | Black | ON-ON | SPDT |


UNIPOLAR DIVERTER WITH BALANCER FOR CARS

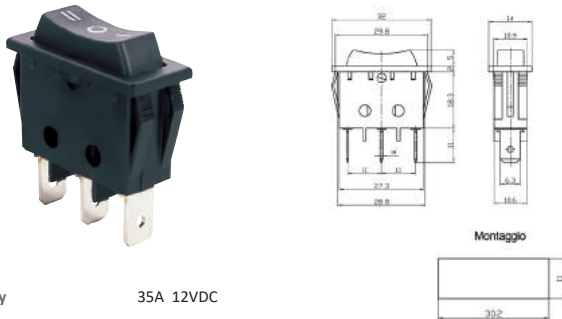

Capacity 35A 12VDC
 Contact Resistance 50mΩ max
 dielectric strenght 1 min 1500V AC
 operating Temperature -25°C~+85°C
 Terminal Type faston 6,3mm
 Screen printing I 0 II
 No. of Terminal 3

| Code | Button Color | function | Type |
|-------------------|--------------|---------------|------|
| 24.5540.00 | Black | (ON)-OFF-(ON) | SPDT |



BIPOLAR DIVERTER WITH BALANCER FOR CARS

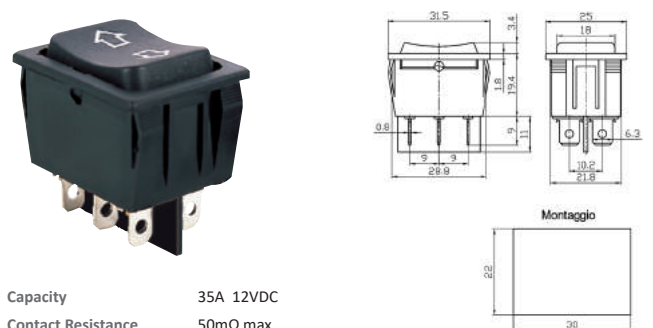

Capacity 35A 12VDC
 Contact Resistance 50mΩ max
 dielectric strenght 1 min 1500V AC
 operating Temperature -25°C~+85°C
 Terminal Type faston 6,3mm
 Screen printing < >
 No. of Terminal 6

| Code | Button Color | function | Type |
|-------------------|--------------|---------------|------|
| 24.5550.00 | Black | (ON)-OFF-(ON) | DPDT |



■ SUBMINIATURE LIMIT SWITCH WITH LEVER



Capacity 1A 125/250V AC
 Contact Resistance 30mΩ max
 dielectric strenght 1 min 1000V AC
 Temperatura di esercizio -25°C~+65°C
 Terminal Type da c.s.
 Actuation force 50±40g
 No. of terminals 3

| Code | Function | Type | Lever Length |
|-------------------|----------|------|--------------|
| 24.2892.00 | ON-(ON) | SPDT | 13 mm |



■ MINIATURE LIMIT SWITCH WITH BUTTON

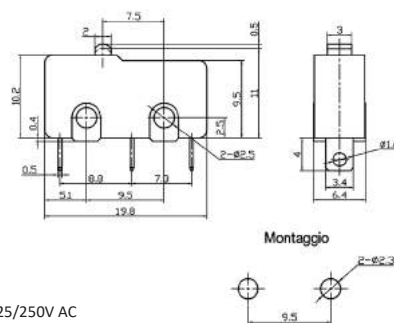

Capacity 5A 125/250V AC
 Contact Resistance 30mΩ max
 dielectric strenght 1 min 1500V AC
 Temperatura di esercizio -25°C~+80°C
 Terminal Type To be welded
 Actuation force 100±40g
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.2893.00 | ON-(ON) | SPDT |



■ SUBMINIATURE LIMIT SWITCH WITH BUTTON



Capacity 1A 125/250V AC
 Contact Resistance 30mΩ max
 dielectric strenght 1 min 1000V AC
 Temperatura di esercizio -25°C~+65°C
 Terminal Type da c.s.
 Actuation force 50±40g
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.2891.50 | ON-(ON) | SPDT |


■ MINIATURE LIMIT SWITCH WITH LEVER



Capacity 5A 125/250V AC
 Contact Resistance 30mΩ max
 dielectric strenght 1 min 1500V AC
 Temperatura di esercizio -25°C~+80°C
 Terminal Type To be welded
 Actuation force 100±40g
 No. of terminals 3

| Code | Function | Type | Lever Length |
|-------------------|----------|------|--------------|
| 24.2891.00 | ON-(ON) | SPDT | 17 mm |
| 24.2894.00 | ON-(ON) | SPDT | 21 mm |


■ DIVERTER LIMIT SWITCH SUBMINISATION WITH CURVED LEVER



Capacity 5A 125/250V AC
 Contact Resistance 30mΩ max
 dielectric strenght 1 min 1500V AC
 Temperatura di esercizio -25°C~+80°C
 Terminal Type To be welded
 Actuation force 100±40g
 No. of terminals 3

| Code | Function | Type | Lever Length |
|-------------------|----------|------|--------------|
| 24.2895.00 | ON-(ON) | SPDT | 17 mm |


■ LIMIT SWITCH WITH LEVER



Capacity 16A 125/250V AC
 Contact Resistance 20mΩ max
 dielectric strenght 1 min 1500V AC
 Temperatura di esercizio -25°C~+85°C
 Terminal Type faston 6,3mm
 Actuation force 160±40g
 No. of terminals 3

| Code | Function | Type | Lever Length |
|-------------------|----------|------|--------------|
| 24.2862.06 | ON-(ON) | SPDT | 13 mm |
| 24.2862.12 | ON-(ON) | SPDT | 27 mm |
| 24.2863.06 | ON-(ON) | SPDT | 53 mm |


MINIATURE LIMIT SWITCH WITH LEVER + WHEEL



Capacity 5A 125/250V AC
 Contact Resistance 30mΩ max
 dielectric strenght 1 min 1500V AC
 Temperatura di esercizio -25°C~+80°C
 Terminal Type To be welded
 Actuation force 100±40g
 No. of terminals 3

| Code | Function | Type | Lever and casters Lenght |
|-------------------|----------|------|--------------------------|
| 24.2845.07 | ON-(ON) | SPDT | 17 mm |


LIMIT SWITCH SWITCH WITH BUTTON

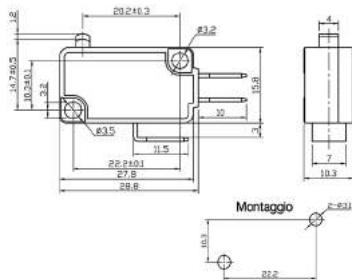

Capacity 16A 125/250V AC
 Contact Resistance 20mΩ max
 dielectric strenght 1 min 1500V AC
 Temperatura di esercizio -25°C~+85°C
 Terminal Type faston 6,3mm
 Actuation force 160±40g
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.2860.40 | ON-(ON) | SPDT |


REINFORCED LIMIT SWITCH WITH SHORT LEVER AND WHEEL



Capacity 15A 125/250V AC
 Contact Resistance 15mΩ max
 dielectric strenght 1 min 1000V AC
 Terminal Type Screw
 Actuation force 160g
 No. of terminals 3

| Code | Function |
|-------------------|------------------|
| 24.3000.01 | COM.- N.A.- N.C. |


LIMIT SWITCH WITH LEVER + WHEEL

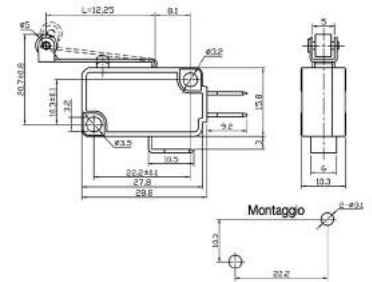

Capacity 16A 125/250V AC
 Contact Resistance 20mΩ max
 dielectric strenght 1 min 1500V AC
 Temperatura di esercizio -25°C~+85°C
 Terminal Type faston 6,3mm
 Actuation force 160±40g
 No. of terminals 3

| Code | Function | Type | Lever and casters Lenght |
|-------------------|----------|------|--------------------------|
| 24.2866.12 | ON-(ON) | SPDT | 12 mm |
| 24.2866.25 | ON-(ON) | SPDT | 25 mm |


REINFORCED BUTTON LIMIT SWITCH



Capacity 15A 125/250V AC
 Contact Resistance 15mΩ max
 dielectric strenght 1 min 1000V AC
 Terminal Type Screw
 Actuation force 250-350g
 No. of terminals 3

| Code | Function |
|-------------------|------------------|
| 24.3000.00 | COM.- N.A.- N.C. |


SHORT LEVER REINFORCED LIMIT SWITCH SWITCH



Capacity 15A 125/250V AC
 Contact Resistance 15mΩ max
 dielectric strenght 1 min 1000V AC
 Terminal Type Screw
 Actuation force 90g
 No. of terminals 3

| Code | Function |
|-------------------|------------------|
| 24.3000.04 | COM.- N.A.- N.C. |


REINFORCED BUTTON LIMIT SWITCH WITH ROLLER



Capacity 15A 125/250V AC
 Contact Resistance 15mΩ max
 dielectric strenght 1 min 1000V AC
 Terminal Type Screw
 Actuation force 250-350g
 No. of terminals 3

Code Function
24.3000.02 COM.- N.A.- N.C.


REINFORCED LIMIT SWITCH WITH LONG LEVER WITH WHEEL



Capacity 15A 125/250V AC
 Contact Resistance 15mΩ max
 dielectric strenght 1 min 1000V AC
 Terminal Type Screw
 Actuation force 100g
 No. of terminals 3

Code Function
24.3000.05 COM.- N.A.- N.C.


REINFORCED LONG LEVER LIMIT SWITCH



Capacity 15A 125/250V AC
 Contact Resistance 15mΩ max
 dielectric strenght 1 min 1000V AC
 Terminal Type Screw
 Actuation force 70g
 No. of terminals 3

Code Function
24.3000.03 COM.- N.A.- N.C.



REINFORCED LEVER LIMIT SWITCH WITH SCREW AND WHEEL



Capacity 15A 125/250V AC
 Contact Resistance 15mΩ max
 dielectric strenght 1 min 1000V AC
 Terminal Type Screw
 Actuation force 141g
 No. of terminals 3

Code Function
24.3000.06 COM.- N.A.- N.C.



SINGLE POLE SLIDE DIVERTER



Capacity 125V AC 0.3A
 Contact Resistance 20mΩ max
 Terminal Type To be welded
 Commutation 1 exchange 2 positions
 No. of terminals 3

Code Function Type
24.4703.12 ON-ON SPDT


SINGLE POLE SLIDE DIVERTER



Capacity 5A 125V AC; 2A 250V AC
 Contact Resistance 20mΩ max
 Terminal Type da c.s.
 Commutation 1 exchange 2 positions
 No. of terminals 3

Code Function Type
24.4718.02 ON-ON SPDT


SINGLE POLE SLIDE DIVERTER

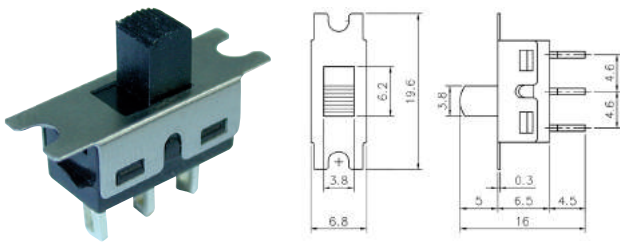

Capacity 5A 125V AC; 2A 250V AC
 Contact Resistance 20mΩ max
 Terminal Type To be welded
 Commutation 1 exchange 2 positions
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.4718.00 | ON-ON | SPDT |


BIPOLAR SLIDE DIVERTER

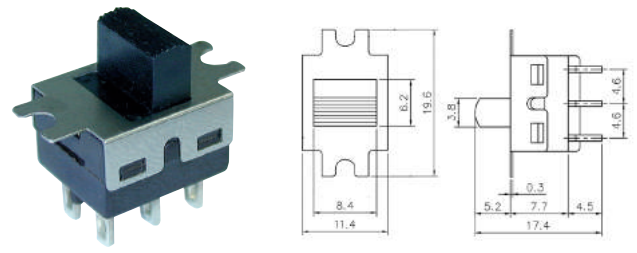

Capacity 5A 125V AC; 2A 250V AC
 Contact Resistance 20mΩ max
 Terminal Type To be welded
 Commutation 1 exchange 2 positions
 No. of terminals 6

| Code | Function | Type |
|-------------------|----------|------|
| 24.4718.03 | ON-ON | DPDT |


SINGLE POLE SLIDE DIVERTER

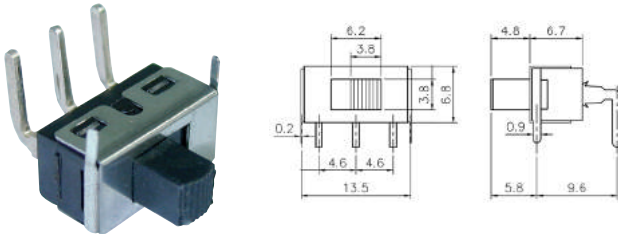

Capacity 5A 125V AC; 2A 250V AC
 Contact Resistance 20mΩ max
 Terminal Type da c.s.
 Commutation 1 scambio 2 posizioni
 No. of terminals 3

| Code | Function | Type |
|-------------------|----------|------|
| 24.4718.01 | ON-ON | SPDT |


KEY SWITCH 2 POSITIONS

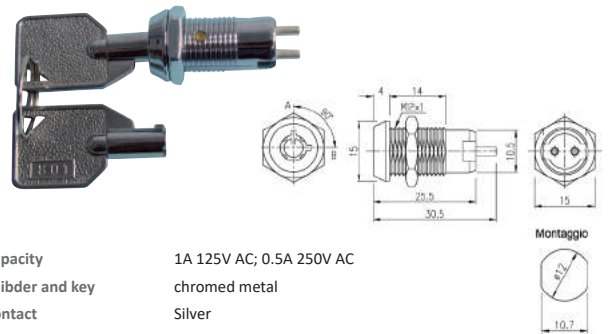

Capacity 1A 125V AC; 0.5A 250V AC
 Cilinder and key chromed metal
 Contact Silver
 Terminal Type to be welded
 Note REMOVABLE KEY IN ALL POSITIONS
 No. of Terminal 2

| Code | Function | Type |
|-------------------|----------|------|
| 24.7700.00 | OFF-ON | SPST |


KEY SWITCH 2 POSITIONS

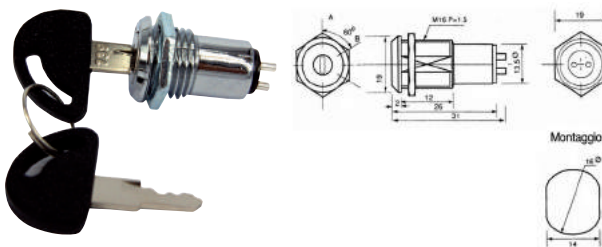

Capacity 1A 125V AC; 0.5A 250V AC
 Cilinder chromed metal
 Key Plastic handle
 Contact Silver
 Terminal Type to be welded
 Note REMOVABLE KEY IN ALL POSITIONS
 No. of Terminal 2

| Code | Function | Type |
|-------------------|----------|------|
| 24.7710.00 | OFF-ON | SPST |


WATERPROOF HOOD FOR MINIATURE LEVER SWITCHES AND DIVERTERS

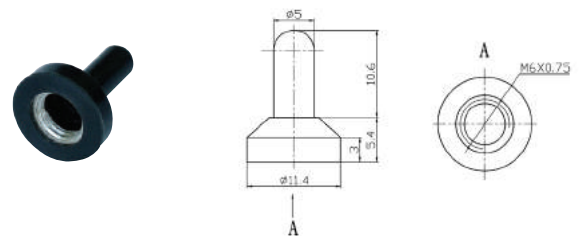

Material Rubber
 Assembly Screw

| Code | Color |
|-------------------|-------|
| 24.5000.05 | Nero |


KEY SWITCH 2 POSITIONS

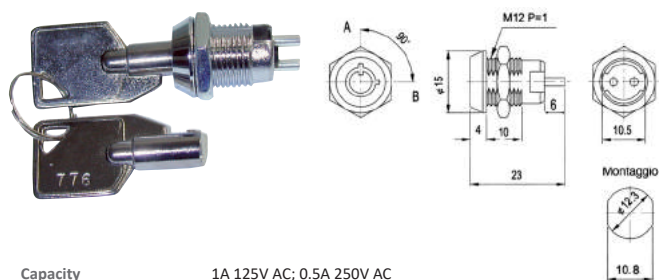

Capacity 1A 125V AC; 0.5A 250V AC
 Cilibder and key chromed metal
 Contact Silver
 Terminal Type to be welded
 Note REMOVABLE KEY IN ALL POSITIONS
 No. of Terminal 2

| Code | Function | Type |
|-------------------|----------|------|
| 24.7710.04 | OFF-ON | SPST |


WATERPROOF HOOD FOR MINIATURE LEVER SWITCHES AND DIVERTERS

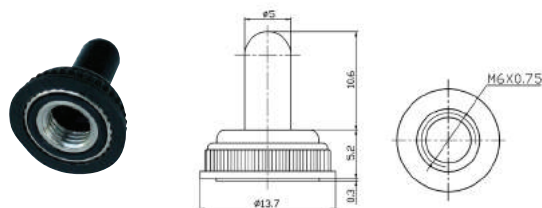

Material Rubber
 Assembly Screw

| Code | Color |
|-------------------|-------|
| 24.5000.07 | Nero |

KEY SWITCH 2 POSITIONS

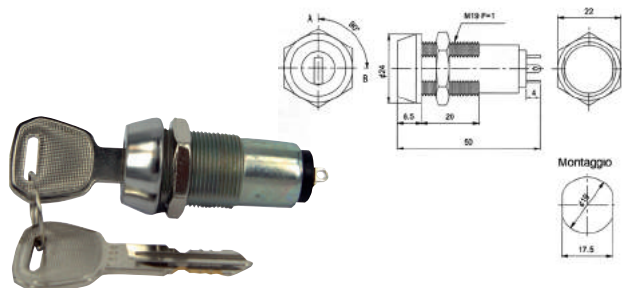

Capacity 4A 125V AC; 2A 250V AC
 Cilibder and key chromed metal
 Contact Silver
 Terminal Type to be welded
 Note REMOVABLE KEY IN ALL POSITIONS
 No. of Terminal 2

| Code | Function | Type |
|-------------------|----------|------|
| 24.7717.00 | OFF-ON | SPST |


WATERPROOF HOOD FOR LEVER SWITCHES AND DIVERTERS



Material Rubber
 Assembly Screw

| Code | Color |
|-------------------|-------|
| 24.5000.12 | Nero |


WATERPROOF HOOD FOR ROCKER SWITCHES AND DIVERTERS DIMENSIONS 21X15

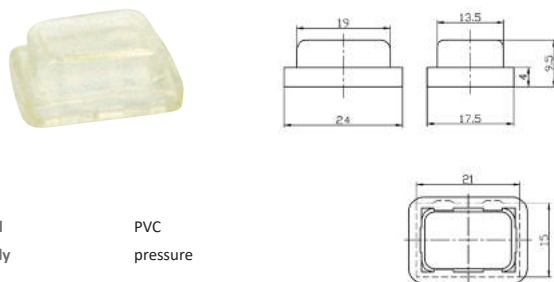

Material PVC
 Assembly pressure

| Code | Color |
|-------------------|-------------|
| 24.2000.10 | Trasparente |

WATERPROOF HOOD FOR ROCKER SWITCHES AND DIVERTERS DIMENSIONS 31X25.5

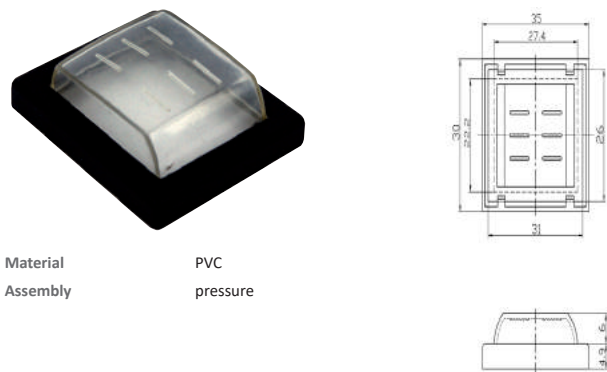

Material PVC
 Assembly pressure

| Code | Color |
|-------------------|-------------|
| 24.2020.10 | Trasparente |


■ WATERPROOF HOOD FOR ROUND ROCKER SWITCHES AND DIVERTERS



Material PVC
 Assembly pressione

| Code | Color | Diameter |
|-------------------|-------------|----------|
| 24.2000.20 | Trasparente | 17mm |
| 24.2000.30 | Trasparente | 23mm |


■ WATERPROOF HOOD FOR ROCKER SWITCHES AND DIVERTERS DIMENSIONS 34.6X26.5



Material PVC
 Assembly pressione

| Code | Color |
|-------------------|-------------|
| 24.2020.20 | Trasparente |

■ WATERPROOF HOOD FOR ROCKER SWITCHES AND DIVERTERS DIMENSIONS 30.5X13.5

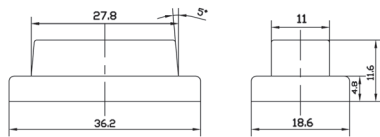

Material PVC
 Assembly pressione

| Code | Color |
|-------------------|-------------|
| 24.2010.20 | Trasparente |

■ 300A BATTERY DISCONNECT SWITCH



| Code |
|-------------------|
| 36.0700.05 |

gbconline.it - [find us on facebook](#)



Kon.El.Co. S.p.A. Piazza Don Mapelli, 75 - 20099 - Sesto San Giovanni - Milano - ITALY