




Cod.	Model	Frequenza Frequency	Tipo codifica Type of coding	Numero canali Number of channels	Programmazione Programming
2145	SECURITY 2	433,92 MHz	Rolling Code	2	to be programmed on the JL2174 - SECURITY KIT control unit
2162	BLACK 2	433,92 MHz	Fixed	2	Self-learning
2163	BLACK 4	433,92 MHz	Fixed	4	Self-learning
2167	SUN VISOR 3	Multifrequency	Fixed	3	Self-learning
2180	OPENER 2	433,92 MHz	Fixed	2	Self-learning
2181	OPENER 4	433,92 MHz	Fixed	4	Self-learning
2205	FUNNY 2	433,92 MHz	Fixed	2	Self-learning

Cod.	Model	Frequenza Frequency	Tipo codifica Type of coding	Numero canali Number of channels	Installazione Installation	Programmazione Programming	Alimentazione Power supply
2164	BLACK INDOOR	433,92 MHz	Fixed	2 configurables: monostable/bistable	Indoor	Self-learning	12Vdc - 24Vac
2165	BLACK OUTDOOR	433,92 MHz	Fixed	2 configurables: monostable/bistable	Outdoor	Self-learning	12Vdc - 24Vac
2166	BLACK EASY LIGHT	433,92 MHz	Fixed	2 configurables: bistable/ timer	Outdoor	Self-learning	220/230 Vac - 50/60 Hz
2174	SECURITY KIT	433,92 MHz	Rolling Code	2 configurables: monostable/bistable	Outdoor	Self-learning	12Vdc - 24Vac
2182	OPENER INDOOR	433,92 MHz	Fixed	2 configurables: monostable/bistable	Indoor	Self-learning	12Vdc - 24Vac
2183	OPENER OUTDOOR	433,92 MHz	Fixed	2 configurables: monostable/bistable	Outdoor	Self-learning	12Vdc - 24Vac
2184	OPENER EASY LIGHT	433,92 MHz	Fixed	2 configurables: bistable/ timer	Outdoor	Self-learning	220/230 Vac - 50/60 Hz

SUPPORTI PER CLIMATIZZATORE · AIR CONDITIONER MOUNTS

41800 WAM-150

Peso 150 Kg
Larghezza 780 mm
Distanza muro 450 mm
Altro Silent block

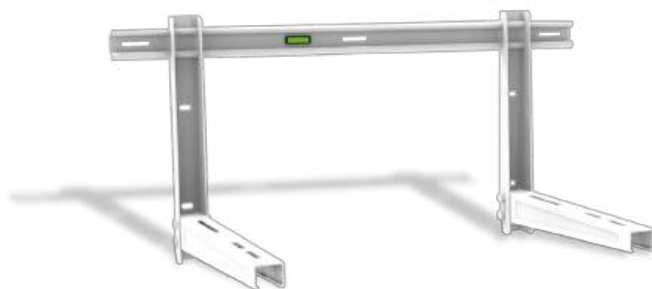

Weight 150 Kg
Width 780 mm
Distance from wall 450 mm
Other Silent block



8 023389 774302
 packaging dimensions
 76 x 8 x 6 cm
 inner carton 10