



8 way tap with 16dB of derivation + 1 D/C direct passage (bidirectional)

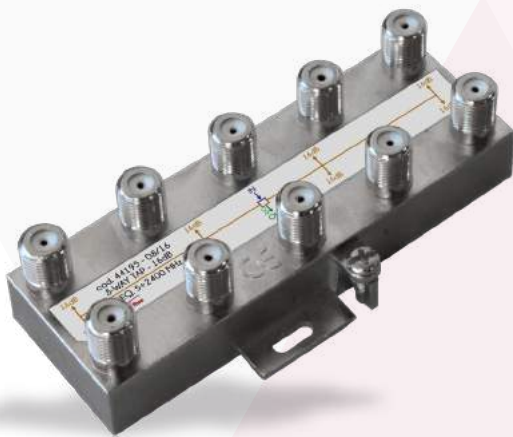

Frequency	5 ÷ 2400 MHz		
Derivation loss dB		perdita di inserzione	
5÷40 MHz	18	5÷40 MHz	4
40÷470 MHz	18	40÷470 MHz	4
470÷1000 MHz	18	470÷1000 MHz	4
1000÷1750 MHz	18,5	1000÷1750 MHz	4,5
1750÷2050 MHz	19	1750÷2050 MHz	5
2050÷2400 MHz	19,5	2050÷2400 MHz	5,5
Separation output-derived dB	18		
DC passing	Between input and loop-through output (bidirectional)		
Connector	F		
Nr. inputs	1		
Outputs	8 + 1 loop-through		

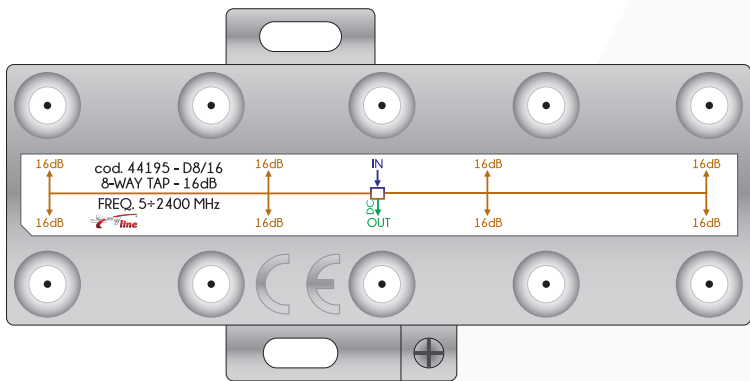

bulk

Packaging 10 x 5 x 2,7 cms

