




Kit for log antenna (pole amplifier with LTE filter + power supplier) in blister



Blister 13 x 30 x 6 cm
Packaging 20 pcz.

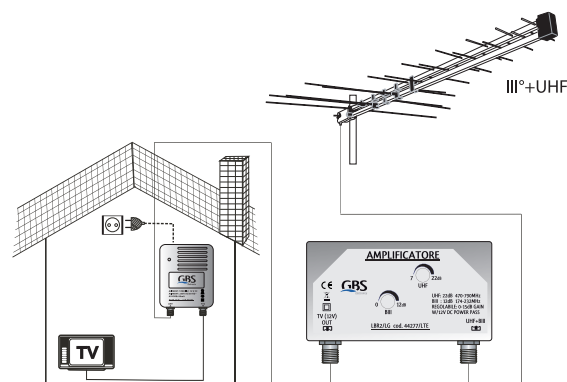

Amplifier frequency	III°: 174 ÷ 232 MHz UHF: 470 ÷ 790 MHz
filter	LTE: 791 ÷ 862 MHz
connector	F
III° band	7 ÷ 12 dB
UHF band	0 ÷ 12 dB
outputs	1
max output	107 dBμV

Power supply connector	F
outputs	2
attenuation	4 dB
mains voltage	230 Vac
output voltage	+ 12 Vdc
max current	80 mA

