




Amplifier with three adjustable uhf/uhf/b3/b1 transistors with wide band, an outdoor box and mast connection - with LTE filter



Blister 14 x 12 x 5 cm
Packaging 25 pcs.

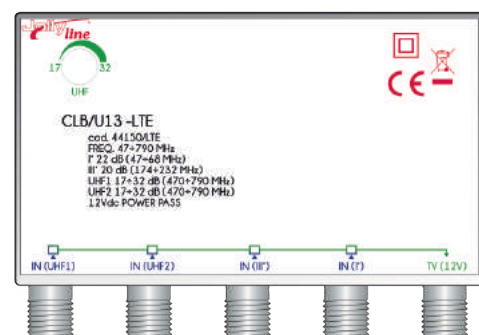

Frequency	I°: 47 ÷ 68 MHz III°: 174 ÷ 232 MHz UHF: 470 ÷ 790 MHz
Filter	LTE: 791 ÷ 862 MHz
Connector	F
Band 1	22 dB
Band 3	20 dB
UHF band	17 ÷ 32 dB
UHF 2 band	17 ÷ 32 dB
Outputs	1
Insertion loss	LTE: < 20 dB
Max output	107 dBμV
Consumption	85 mA
Noise figure	4 dB
Impedance	75 Ohm
Power supply	12 Vdc

