


1 way tap with 10dB of derivation + 1 D/C direct passage (bidirectional)



Frequency	5 ÷ 2400 MHz		
Derivation loss dB		Insertion loss dB	
5÷40 MHz	11,5	5÷40 MHz	1,5
40÷470 MHz	11,5	40÷470 MHz	1,5
470÷1000 MHz	11,5	470÷1000 MHz	2
1000÷1750 MHz	12	1000÷1750 MHz	3
1750÷2050 MHz	12	1750÷2050 MHz	3
2050÷2400 MHz	12,5	2050÷2400 MHz	3
Separation output-derived dB	18		
DC passing	Between input and loop-through output (bidirectional)		
Connector	F		
Nr. inputs	1		
Outputs	1 + 1 loop-through		

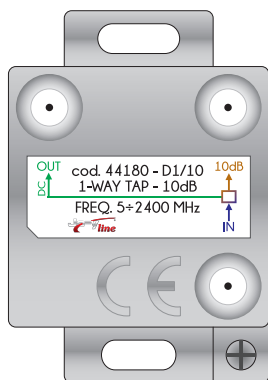

bulk

Packaging 3,5 x 5 x 2,7 cms

