



4 way tap with 12dB of derivation + 1 D/C direct passage (bidirectional)

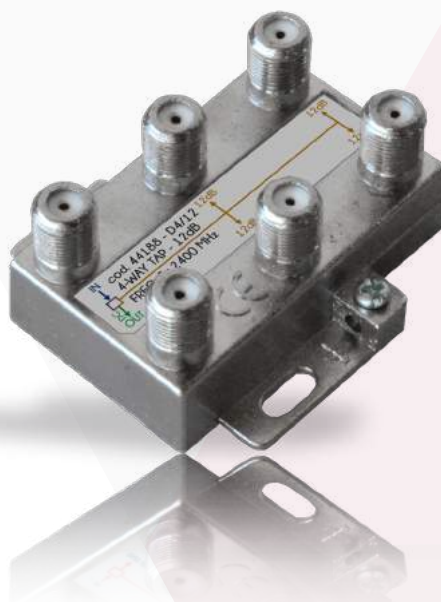

Frequency	5 ÷ 2400 MHz		
Derivation loss dB		Insertion loss dB	
5÷40 MHz	13,5	5÷40 MHz	5
40÷470 MHz	13,5	40÷470 MHz	5
470÷1000 MHz	13,5	470÷1000 MHz	5
1000÷1750 MHz	14	1000÷1750 MHz	5,5
1750÷2050 MHz	14,5	1750÷2050 MHz	5,5
2050÷2400 MHz	15	2050÷2400 MHz	6
Separation output-derived dB	18		
DC passing	Between input and loop-through output (bidirectional)		
Connector	F		
Nr. inputs	1		
Outputs	4 + 1 loop-through		

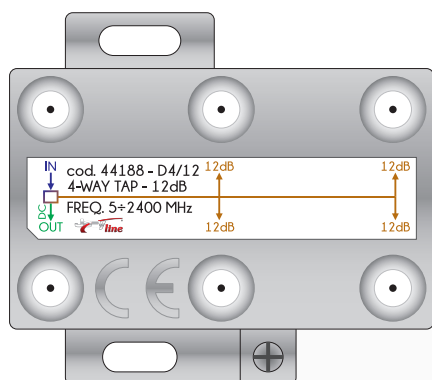

bulk

Packaging 6 x 5 x 2,7 cms



Quantity
in master
carton
50 pz.



8 028626 441887

