

LBR2/LG-2OUT -LTE


code **44278/LTE**



Amplifier for log 3 adjustable transistors with F connector, 2 outputs, an outdoor box and mast connection - with LTE filter



Blister 10 x 12 x 6 cm
Packaging 25 pcs.

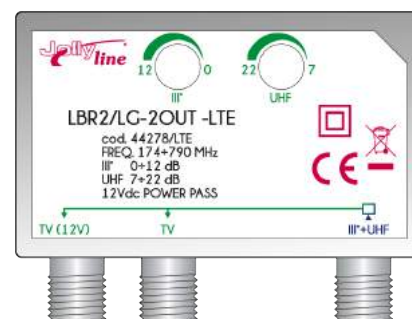

Frequency	III°: 174 ÷ 232 MHz UHF: 470 ÷ 790 MHz
Filter	LTE: 791 ÷ 862 MHz
Connector	F
Band 3	0 ÷ 12 dB
UHF band	7 ÷ 22 dB
Outputs	2
Insertion loss	LTE: < 20 dB
Max output	107 dBμV
Consumption	60 mA
Noise figure	4 dB
Impedance	75 Ohm
Power supply	12 Vdc

