




Amplifier with four transistors, 4 adjustable inputs (IV +35ch, V° -35ch) with F connector, an outdoor box and mast connection - with LTE filter



Blister 14 x 12 x 5 cm
Packaging 25 pcs.

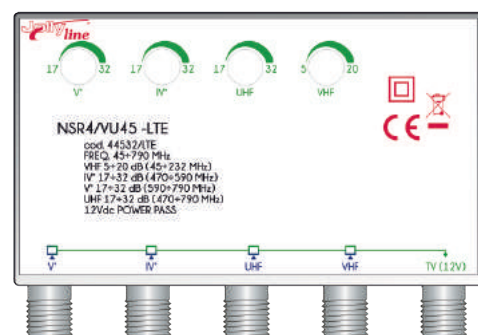

Frequency	VHF: 45 ÷ 232 MHz IV°: 470 ÷ 590 MHz V°: 590 ÷ 790 MHz UHF: 470 ÷ 790 MHz
Filter	LTE: 791 ÷ 862 MHz
Connector	F
Band 4	17 ÷ 32 dB
Band 5	17 ÷ 32 dB
UHF band	17 ÷ 32 dB
VHF band	5 ÷ 20 dB
Outputs	1 dc
Insertion loss	LTE: < 20 dB
Max output	107 dBμV
Consumption	90 mA
Noise figure	5 dB
Impedance	75 Ohm
Power supply	12 Vdc

