




Amplifier with four transistors, 3 adjustable inputs (IV +35ch, V° -35ch) with F connector, an outdoor box and mast connection - with LTE filter



Blister 14 x 12 x 5 cm  
Packaging 25 pcs.

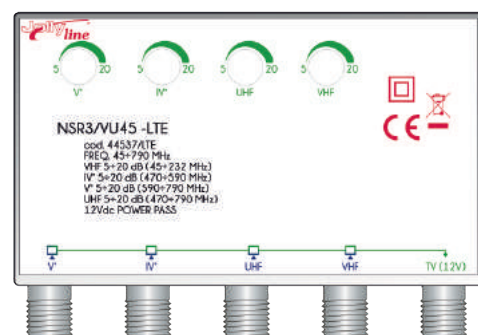

|                |                                                                                    |
|----------------|------------------------------------------------------------------------------------|
| Frequency      | VHF: 45 ÷ 232 MHz<br>IV°: 470 ÷ 590 MHz<br>V°: 590 ÷ 790 MHz<br>UHF: 470 ÷ 790 MHz |
| Filter         | LTE: 791 ÷ 862 MHz                                                                 |
| Connector      | F                                                                                  |
| Band 4         | 5 ÷ 20 dB                                                                          |
| Band 5         | 5 ÷ 20 dB                                                                          |
| UHF band       | 5 ÷ 20 dB                                                                          |
| VHF band       | 5 ÷ 20 dB                                                                          |
| Outputs        | 1 dc                                                                               |
| Insertion loss | LTE: < 20 dB                                                                       |
| Max output     | 107 dBμV                                                                           |
| Consumption    | 90 mA                                                                              |
| Noise figure   | 5 dB                                                                               |
| Impedance      | 75 Ohm                                                                             |
| Power supply   | 12 Vdc                                                                             |

