




3-transistor amplifier - 2 adjustable inputs with F connector equipped with outdoor case and pole connector - with LTE filter



Blister 10 x 12 x 6 cm
Packaging 25 pcs.

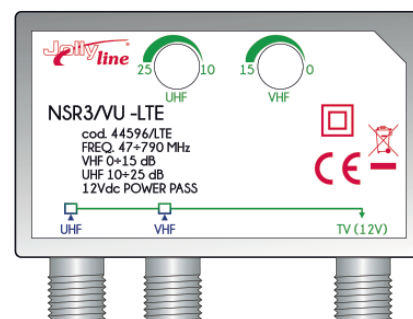

Frequency	VHF: 47 ÷ 232 MHz UHF: 470 ÷ 790 MHz
Filter	LTE: 791 ÷ 862 MHz
Connector	F
UHF band	10 ÷ 25 dB
VHF band	0 ÷ 15 dB
Outputs	1
Insertion loss	LTE: < 20 dB
Max output	107 dBμV
Consumption	90 mA
Noise figure	5 dB
Impedance	75 Ohm
Power supply	12 Vdc

