


Amplifier with two UHF/VHF transistors and one mix VHF transistor with F connector, an outdoor box and mast connection - with 5G filter



Frequency	VHF: 40 ÷ 240 MHz UHF: 470 ÷ 694 MHz
Filter	5G: 694 ÷ 862 MHz
Connector	F
UHF band	20 dB
UHF 2 band	12 dB
VHF band	MIX
Outputs	1
Insertion loss	5G: < 20 dB
Max output	107 dBμV
Consumption	40 mA
Noise figure	4 dB
Impedance	75 Ohm
Power supply	12 Vdc

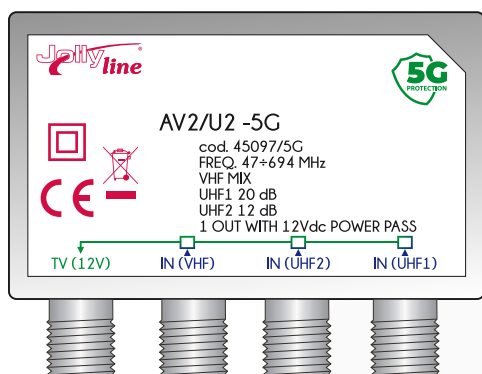

Packaging 8 x 13 x 5 cms



Quantity
in master
carton
30 pz.



Via delle Valli, snc
04011, Aprilia (LT)
www.jollyline.it



8 023389 760350