


# NSR3/2UHF-2OUT -5G

cod. 45412/5G

3 transistor amplifier - 2 inputs and 2 outputs (1 with DC) with F connection equipped with box for outdoor use and pole connection - with 5G filter



Frequency	UHF: 470 ÷ 694 MHz
Filter	5G: 694 ÷ 862 MHz
Connector	F
UHF band	5 ÷ 20 dB
UHF 2 band	5 ÷ 20 dB
Outputs	1 + 1 cc
Insertion loss	5G: < 20 dB
Max output	107 dBμV
Consumption	90 mA
Noise figure	5 dB
Impedance	75 Ohm
Power supply	12 Vdc

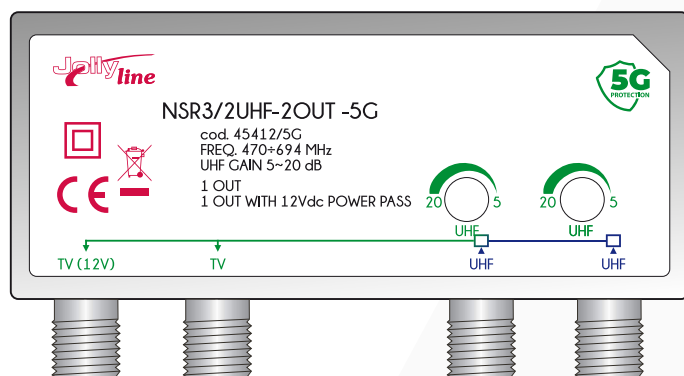

Packaging 13 x 14 x 5 cms

**Jollyline**



Via delle Valli, snc  
04011, Aprilia (LT)  
[www.jollyline.it](http://www.jollyline.it)



Quantity  
in master  
carton  
30 pz.

