

Amplifier for log 3 adjustable transistors with F connector, an outdoor box and mast connection - with 5G filter



Frequency

VHF: 47 ÷ 232 MHz
UHF: 470 ÷ 694 MHz

Filter

5G: 694 ÷ 862 MHz

Connector

F

UHF band

15 ÷ 30 dB

UHF 2 band

15 ÷ 30 dB

VHF+UHF band

0 ÷ 18 dB

Outputs

1

Insertion loss

5G: < 20 dB

Max output

107 dBμV

Consumption

85 mA

Noise figure


5 dB

Impedance

75 Ohm

Power supply

12 Vdc

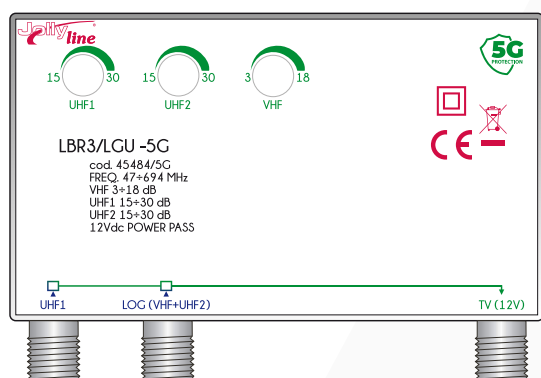

Packaging 13 x 14 x 5 cms

