

Amplifier with four transistors, 3 adjustable inputs (IV +35ch, V° -35ch) with F connector, an outdoor box and mast connection - with 5G filter



Frequency

VHF: 45 ÷ 232 MHz
IV°: 470 ÷ 590 MHz
V°: 590 ÷ 694 MHz
UHF: 470 ÷ 694 MHz

Filter

5G: 694 ÷ 862 MHz

Connector

F

Band 4

5 ÷ 20 dB

Band 5

5 ÷ 20 dB

UHF band

5 ÷ 20 dB

VHF band

5 ÷ 20 dB

Outputs

1 dc

Insertion loss

5G: < 20 dB

Max output

107 dBμV

Consumption

90 mA

Noise figure


5 dB

Impedance

75 Ohm

Power supply

12 Vdc

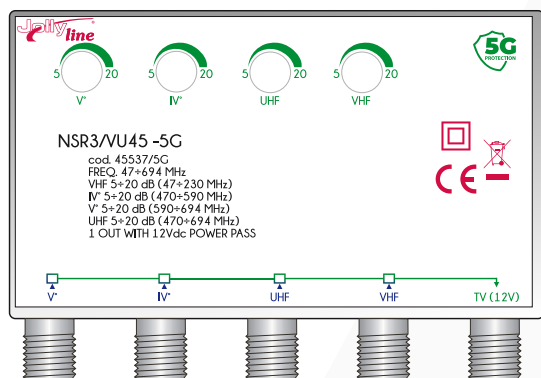

Packaging 14 x 12 x 5 cms

