

3-transistor amplifier - 2 adjustable inputs with F connector equipped with outdoor case and pole connector - with 5G filter



Frequency

VHF: 47 ÷ 232 MHz
UHF: 470 ÷ 694 MHz

Filter

5G: 694 ÷ 862 MHz

Connector

F

UHF band

10 ÷ 25 dB

VHF band

0 ÷ 15 dB

Outputs

1

Insertion loss

5G: < 20 dB

Max output

107 dBμV

Consumption

90 mA

Noise figure


5 dB

Impedance

75 Ohm

Power supply

12 Vdc

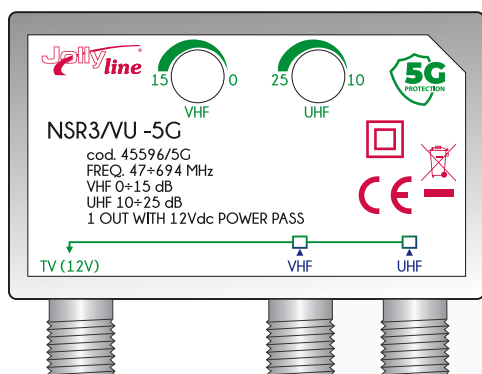

Packaging 10 x 12 x 6 cms



Quantity
in master
carton
100 pz.



Via delle Valli, snc
04011, Aprilia (LT)
www.jollyline.it



8 023389 760596