

Amplifier with 3 transistors, 3 adjustable inputs with F connector, an outdoor box and mast connection - with 5G filter



Frequency

VHF: 47 ÷ 232 MHz
UHF: 470 ÷ 694 MHz

Filter

5G: 694 ÷ 862 MHz

Connector

F

UHF band

7 ÷ 22 dB

UHF 2 band

7 ÷ 22 dB

VHF band

3 ÷ 18 dB

Outputs

1 dc

Insertion loss

5G: < 20 dB

Max output

107 dBμV

Consumption

90 mA

Noise figure


5 dB

Impedance

75 Ohm

Power supply

12 Vdc

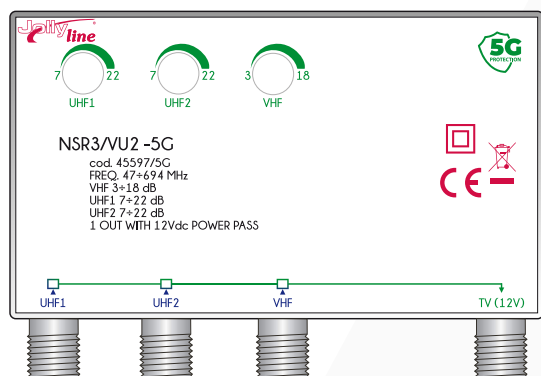

Packaging 13 x 14 x 5 cms



Quantity
in master
carton
30 pz.



Via delle Valli, snc
04011, Aprilia (LT)
www.jollyline.it

