

Amplifier with 3 transistors, 3 adjustable inputs, 2 outputs with F connector, an outdoor box and mast connection - with 5G filter



Frequency

VHF: 47 ÷ 232 MHz
UHF: 470 ÷ 694 MHz

Filter

5G: 694 ÷ 862 MHz

Connector

F

UHF band

0 ÷ 20 dB

UHF 2 band

0 ÷ 20 dB

VHF band

0 ÷ 20 dB

Outputs

1 + 1 cc

Insertion loss

5G: < 20 dB

Max output

107 dBμV

Consumption

85 mA

Noise figure


5 dB

Impedance

75 Ohm

Power supply

12 Vdc

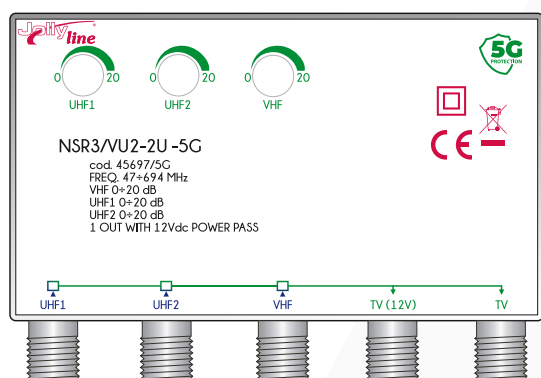

Packaging 13 x 14 x 5 cms

