



CBX/V45U -5G PLUS

cod. 45976/5G-EU

Wall switchboard with 4 separate adjustable inputs - VHF, UHF, IV and V - connection F - 118dB μ V - 35 dB - with certified 5G filter

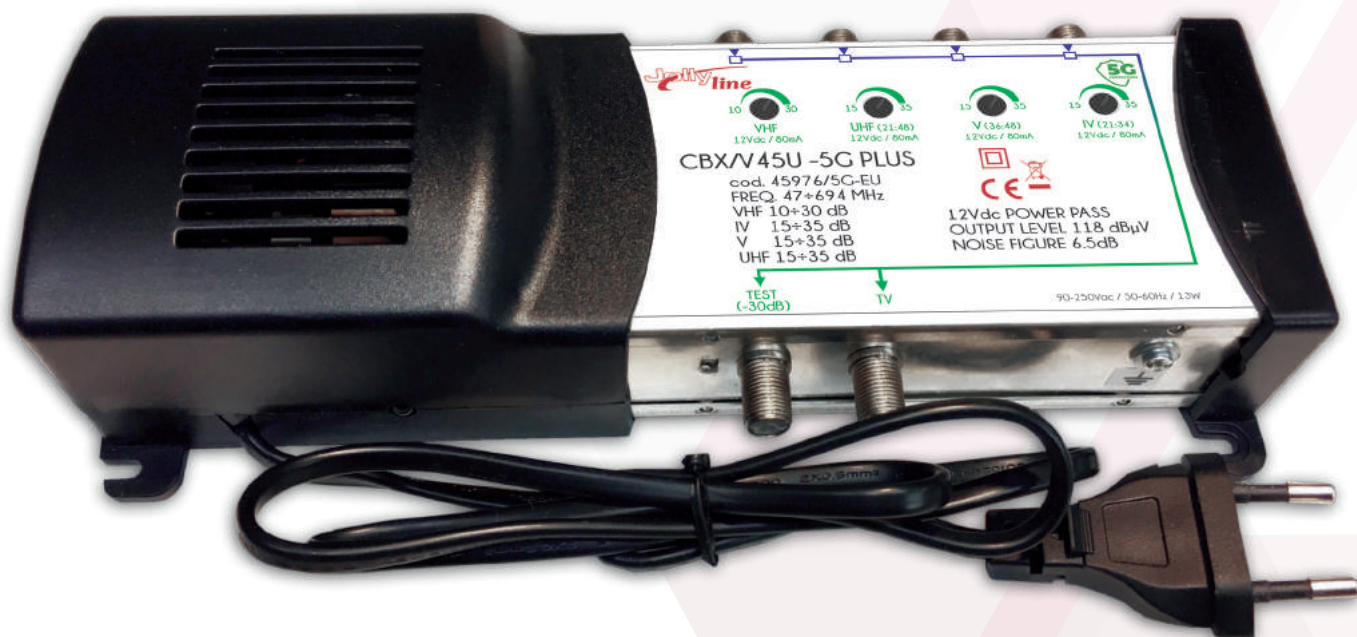

Gain	VHF: 30 dB IV°, V° e UHF: 35 dB
Frequency	VHF: 47 ÷ 230 MHz IV°: 470 ÷ 590 MHz V°: 590 ÷ 694 MHz UHF: 470 ÷ 694 MHz
Filter	5G: 694 ÷ 862 MHz
Connector	F
Band 4	15 ÷ 35 dB
Band 5	15 ÷ 35 dB
UHF band	15 ÷ 35 dB
VHF band	10 ÷ 30 dB
Outputs	1 + 1 test (-30 dB)
Insertion loss	5G: < 20 dB
Max output	118 dB μ V
Noise figure	6,5 dB
Remote power feeding	Automatica 12 Vcc/80mA
Power supply	90~250Vac - 50/60Hz

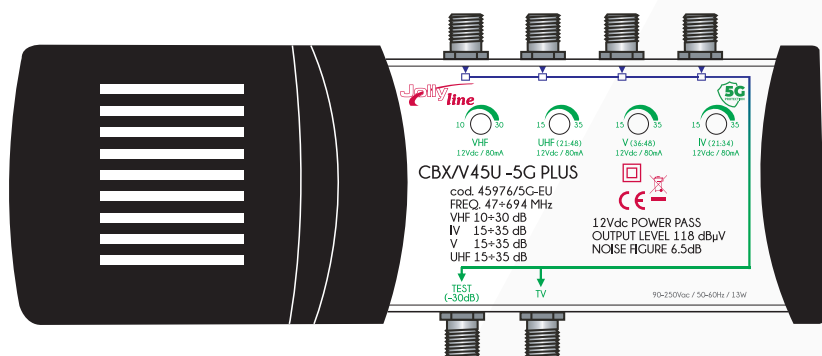

Packaging 25 x 12 x 6 cms

Jolly line



Via delle Valli, snc
04011, Aprilia (LT)
www.jollyline.it



Quantity
in master
carton
18 pz.



8 023389 769285